



SHAOXING SHANGYU KAIDA LIGHTING TECHNOLOGY CO.,LTD.

Add: Yuebei Cun,Xiaoyue Street, Shangyu District, Shaoxing City, Zhejiang Prov. China.

Tel.: +86-575-82033589

Fax.: +86-575-82913598

Web: WWW.KDLAMPS.CN

E-mail: Kaidalamps@vip.163.com



SHAOXING SHANGYU
KAIDA LIGHTING
TECHNOLOGY CO.,LTD

2026

light Up the Future



12 years ago, with a dream of “light up the future”, our team built Kaida Lighting Technology. The purpose was simple: design and produce perfect lamps to our customers.

Products: As an outdoor lighting factory, we do not make all range products, but make some range and then modify it step by step. We believe that a product is not come to us in a perfect way, we start it and then modify it to perfect. We insist 3 policy on our products: simple, economical, easy installation.

Quality: We believe quality is life of our factory. For LED product, we grantee 100% inspection on wattage test, high voltage holding test, and earth ground test.

People: We have a young tam with average age 35, gifted and full of energy. We give chances to young people to prove themselves.

Cooperation: Customers for us is not the more the better, we prefer customers who could join us when developing new products, give us feedback of the marketing. We would like to support our customers by giving exclusive sales of our new products in his country.

Thanks for review, and hope we can do something from here.

Research & Deve Lopment



Photoelectricityintegrating systems



IP TEST



Salt spray test



Voltage withstand test



Earth test



Power test



Assembling workshop

Certificate



Global



CE



IK



62778






ROHS

catalogue

Wall Lamp							
							
							
							
							
							
							

BOLLARD

SPOTLIGHT

			
---	---	---	---

WALL RECESSED LAMP

					
--	--	--	--	--	--


OUTDOOR WALL LAMP



Light up the future • Don't let the color slip away

14幢



WM622



WM622-PIR



B622

Item No.	WM622	WM622-PIR	B622
Watt	LED SMD 21W	LED SMD 21W	LED SMD 21W
Led Color Option	3000K-5000K CCT	3000K-5000K CCT	3000K-6500K CCT
Luminous flux	2000lm(3000K)	2000lm(3000K)	2000lm(3000K)
Beam Angle	120°	120°	120°
CRI	80	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.9	≥ 0.9	>0.9
Safety type	IP65 Class I	IP65 Class I	IP65 Class I

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

PC Diffuser



Silicon rubber gasket



Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size







Item No.	WM621
Watt	LED SMD 21W
Led Color Option	2700K~6500K
Luminous flux	1800lm(3000K)
Beam Angle	120°
CRI	80
Input	220-240V~ 50Hz
Power factor	≥0.9
Safety type	IP65 Class 1


Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- PC Diffuser
- Silicon rubber gasket

  RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	



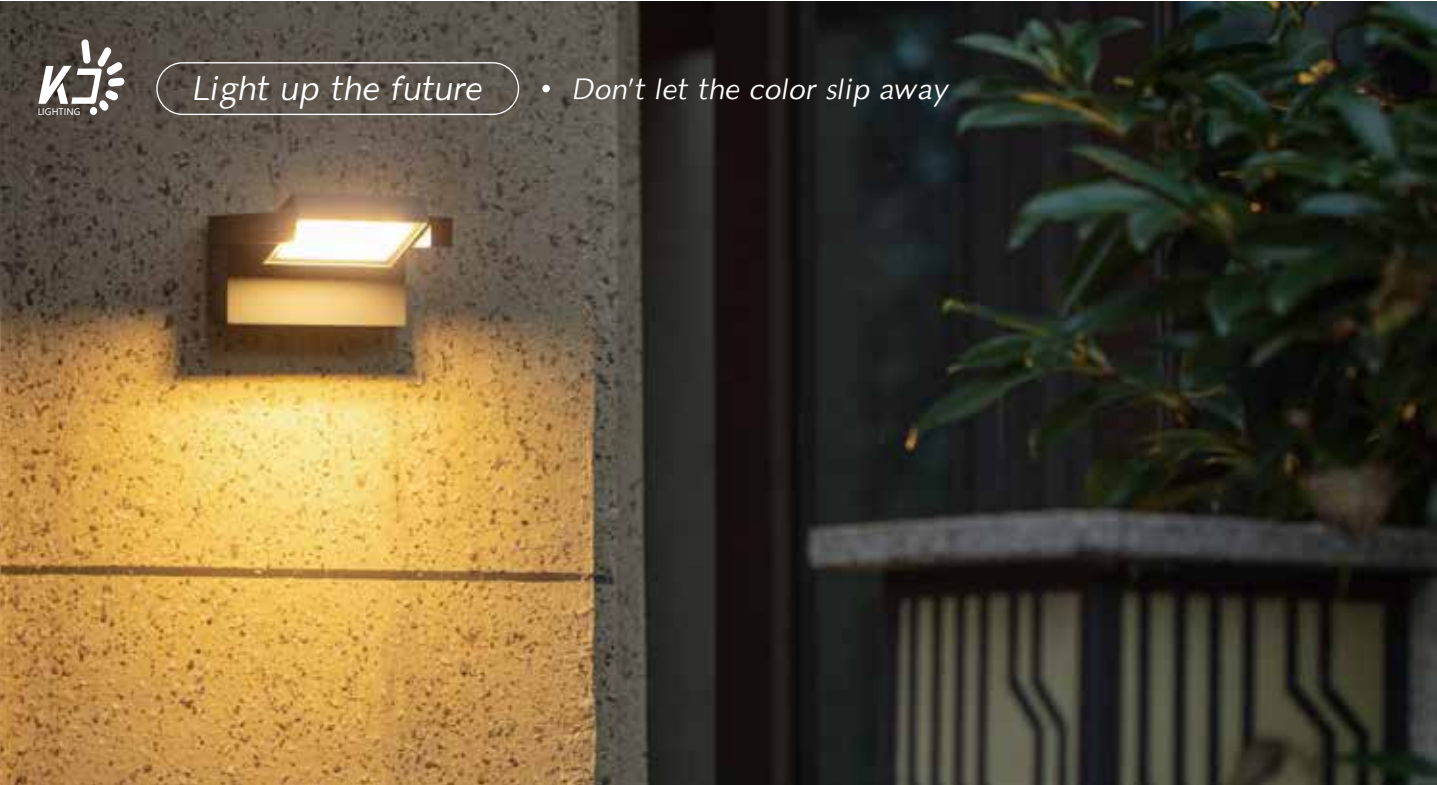

WM471



WM472



WM473



WM471-PIR



WM472-PIR



WM473-PIR

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

  RoHS

Finishing Color

- WHITE 
- SILVER GREY 
- DARK GREY 
- BLACK 

Lighting snapshot



WM474




RIR and CCT Remote Support



Item No.	WM471 / WM471-PIR	WM472 / WM472-PIR	WM473 / WM473-PIR	WM474 / WM474-PIR
Watt	LED SMD 12W	LED SMD 21W	LED SMD 36W	LED SMD 50W
Led Color Option	2700K-6500K	2700K-6500K	2700K-6500K	2700K-6500K
Luminous flux	1000lm	2000lm	4000lm	5000lm
Beam Angle	150°	150°	150°	150°
CRI	80	80	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.82	≥0.9	≥0.8	≥0.9
Safety type	IP65 Class 1	IP65 Class 1	IP65 Class 1	IP65 Class 1

Size

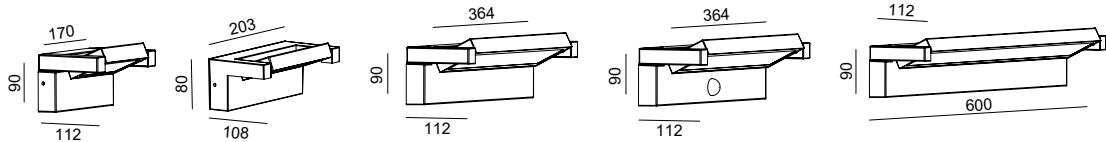



Light up the future • Don't let the color slip away



WM530

Item No.	WM530
Watt	LED COB 12W
Led Color Option	2700K~6500K
Luminous flux	650lm(3000K)
Beam Angle	100°
CRI	80
Input	220-240V~ 50Hz
Power factor	≥0.82
Safety type	IP65 Class 1

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket




Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Lighting snapshot



Size

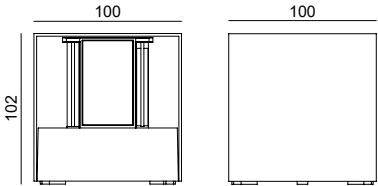

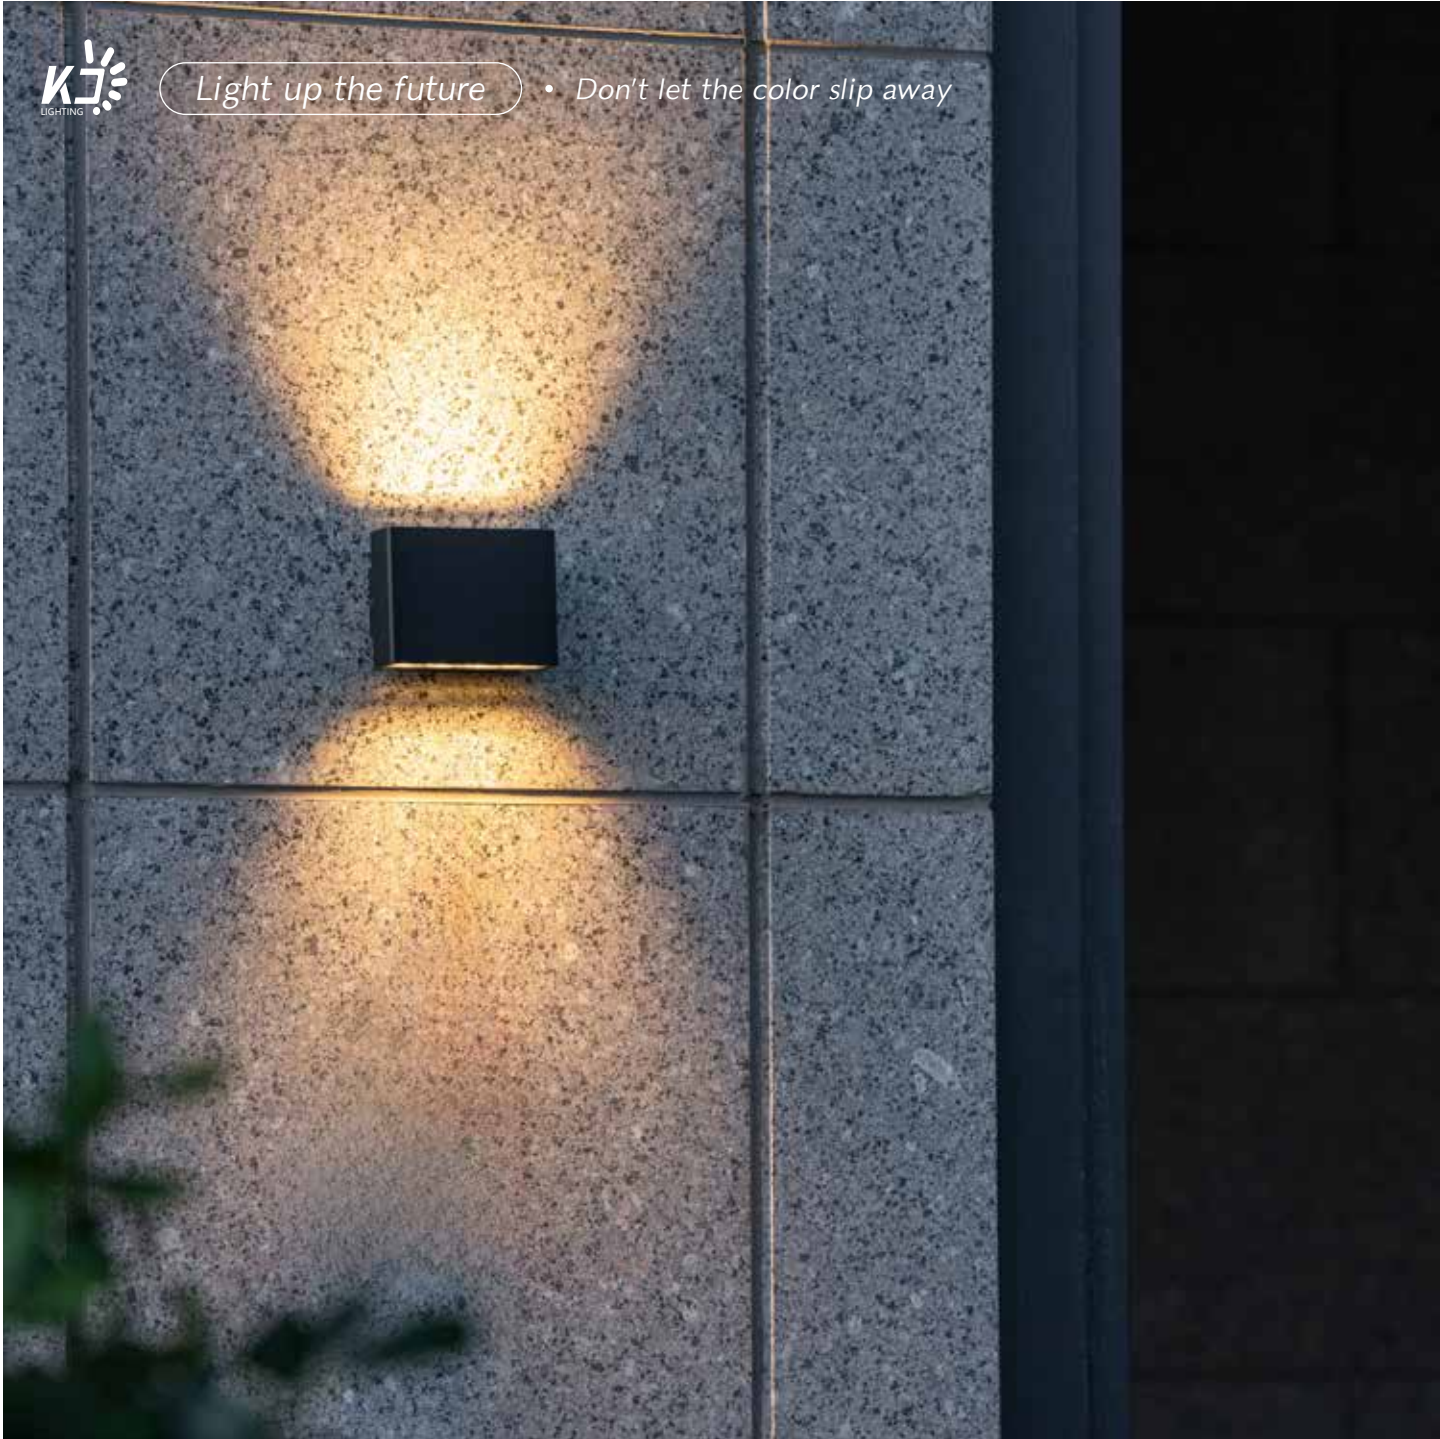

WM555




WM556



Item No.	WM555	WM556
Watt	LED SMD 6W	LED SMD 12W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	500lm(3000K)	880lm(3000K)
Beam Angle	36°	36°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.82
Safety type	IP65 Class I	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⏚ CE RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	





WM550



WM551

Item No.	WM550	WM551
Watt	7W	13W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	500lm(3000K)	880lm(3000K)
Beam Angle	36°	36°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	≥0.82
Safety type	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body


Powder coated with pretreatment for outdoor use

Glass Diffuser


Silicon rubber gasket

  RoHS


Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Lighting snapshot



Size

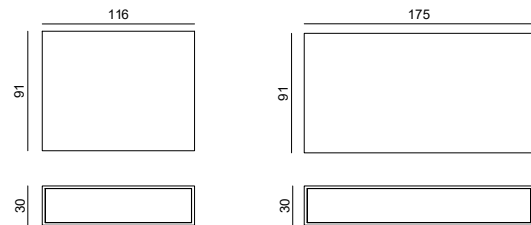

WM553



WM554

Item No.	WM553	WM554
Watt	LED SMD 7W	LED SMD 13W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	500lm(3000K)	880lm(3000K)
Beam Angle	36°	36°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.82
Safety type	IP65 Class I	IP65 Class I

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

PC Diffuser



Silicon rubber gasket

  RoHS

Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size





Light up the future • Don't let the color slip away



WM167



WM168

Item No.	WM167	WM168
Watt	LED SMD 4W	LED SMD 7W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	320lm(3000K)	510lm(3000K)
Beam Angle	60°	60°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.5	≥0.8
Safety type	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

Glass Diffuser

Silicon rubber gasket




Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	


Lighting snapshot



Size

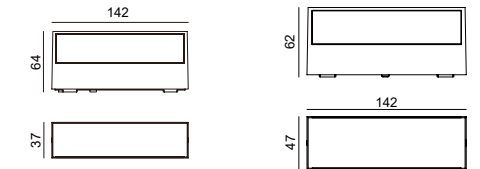


Photometric data

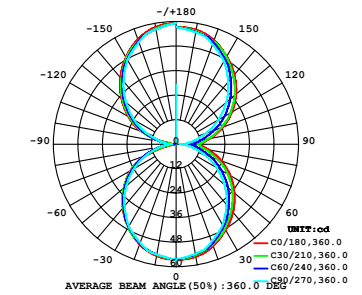



Light up the future • Don't let the color slip away

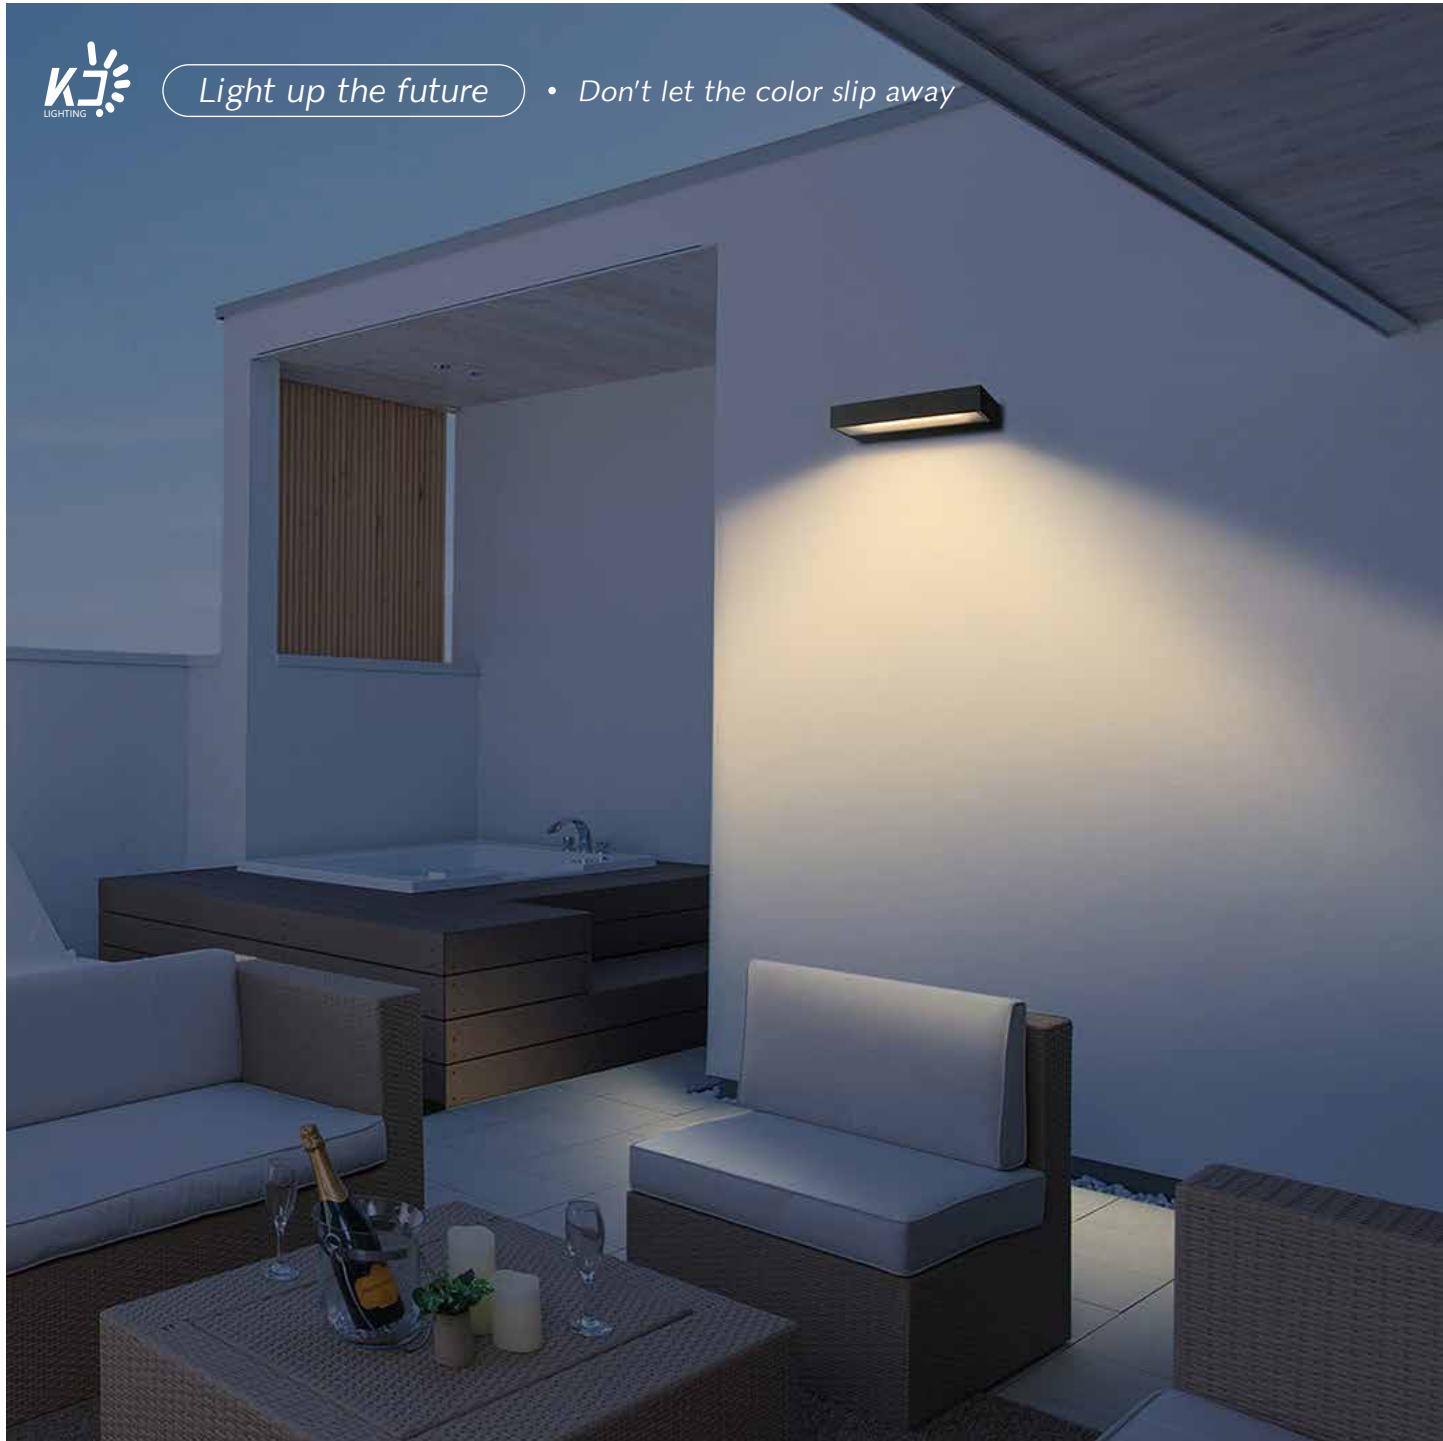

WM171-III



WM176-III



WM176-IV



Item No.	WM171-III	WM176-III / WM176-IV
Watt	LED SMD 8W	LED SMD 2×7W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	510lm(3000K)	1000lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.8
Safety type	IP65 Class I	IP65 Class I


Description

Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket

CE RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	



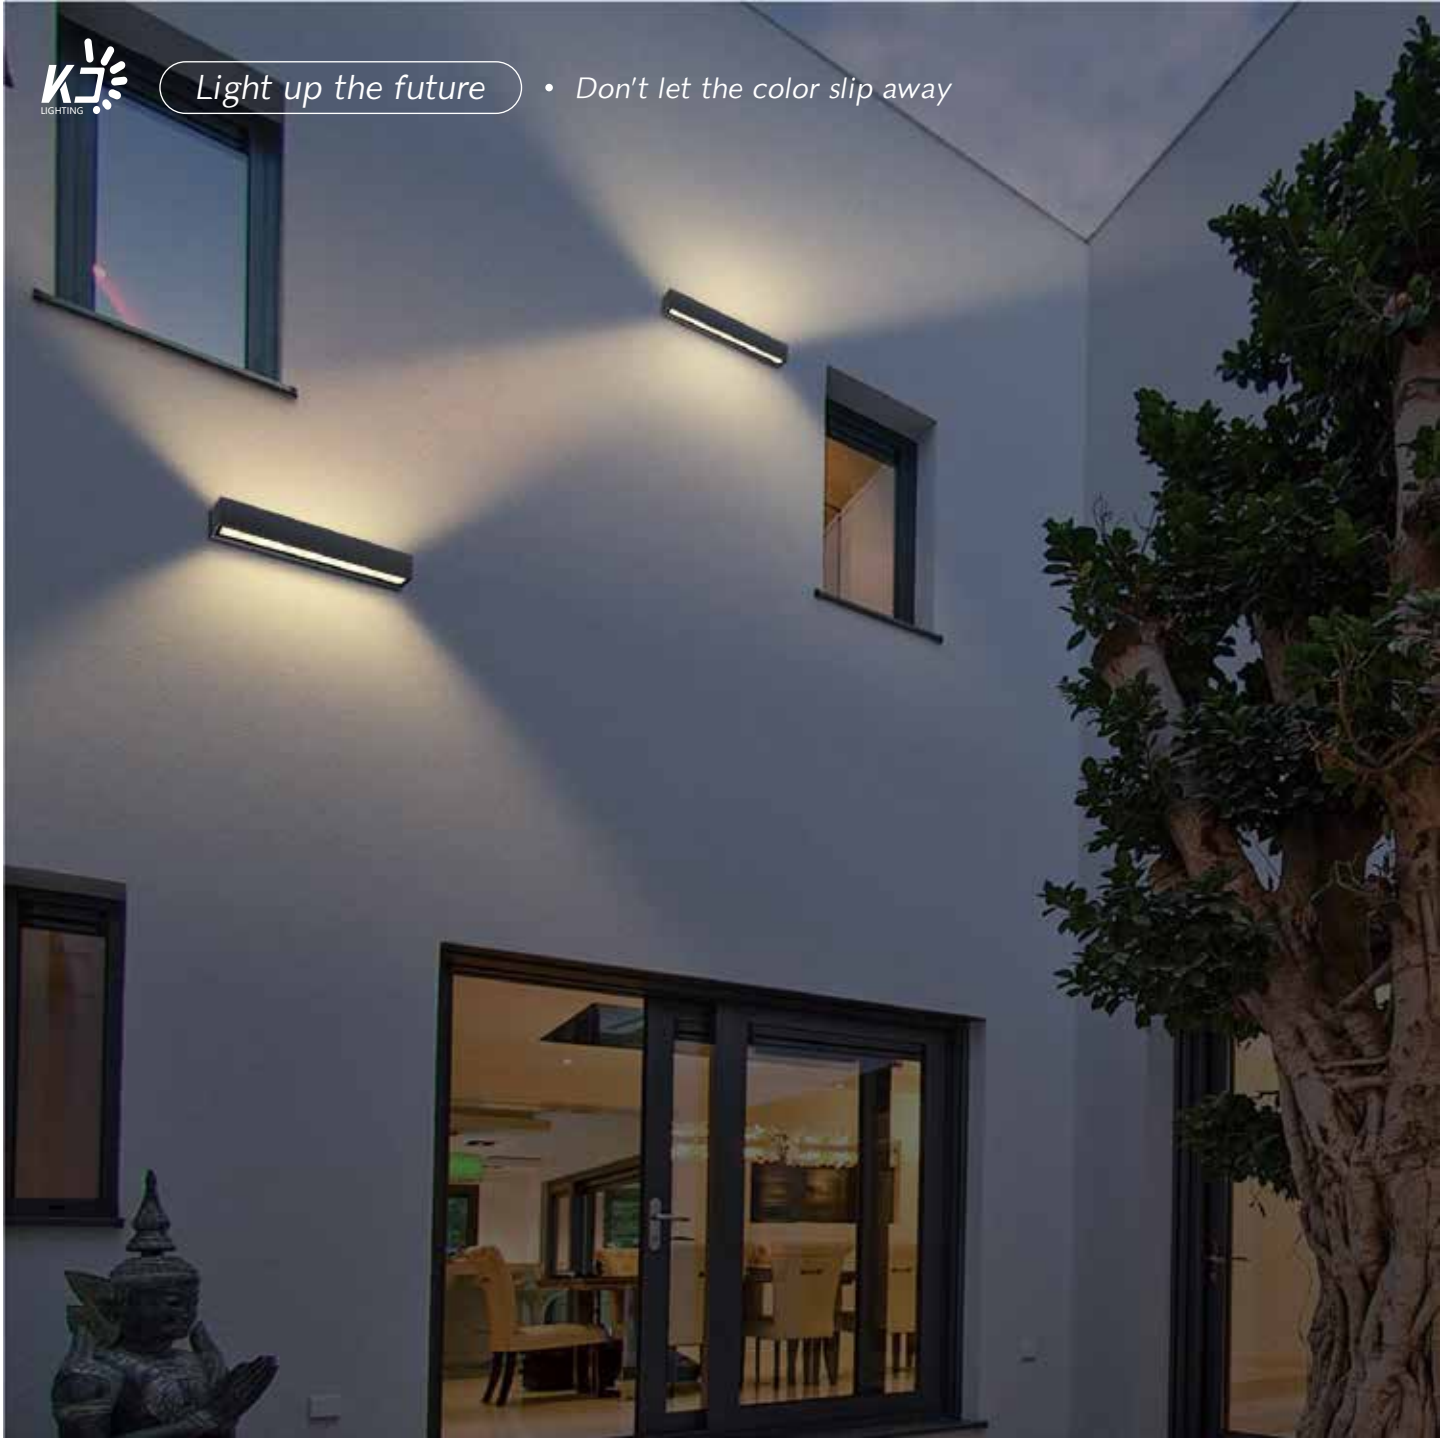

Light up the future • Don't let the color slip away



WM177-II



WM179-III


Item No.	WM177-II	WM179-III
Watt	LED SMD 20W	LED SMD 24W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	1500lm(3000K)	2000lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.8
Safety type	IP65 Class I	IP65 Class I


Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	



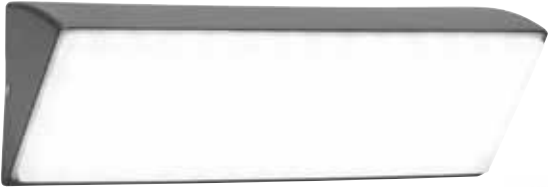

WM226



WM228



WM223


Item No.	WM226	WM228	WM223
Watt	LED SMD 65W	LED SMD 40W	LED SMD 24W
Led Color Option	2700K-6500K CCT	2700K-6500K CCT	2700K-6500K CCT
Luminous flux	6000lm	4000lm	2400lm
Beam Angle	120°	120°	120°
CRI	80	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.9	≥0.9	≥0.82
Safety type	IP65 Class 1	IP65 Class 1	IP65 Class 1

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- PC Diffuser
- Silicon rubber gasket




Lighting snapshot



Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

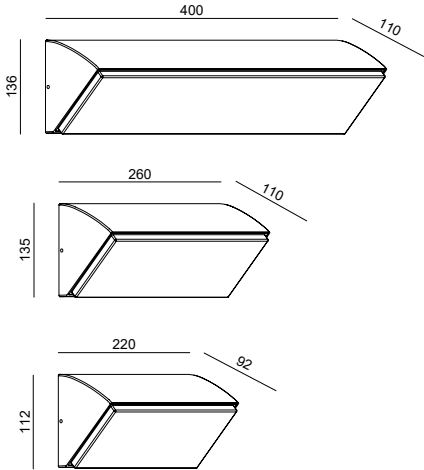



Light up the future • Don't let the color slip away



WM575



WM575-PIR

Item No.	WM575	WM575-PIR
Watt	LED SMD 12W	LED SMD 12W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	800lm	800lm
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.82	≥0.82
Safety type	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

PC Diffuser


Silicon rubber gasket

CE RoHS


Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Lighting snapshot




Size





Light up the future • Don't let the color slip away

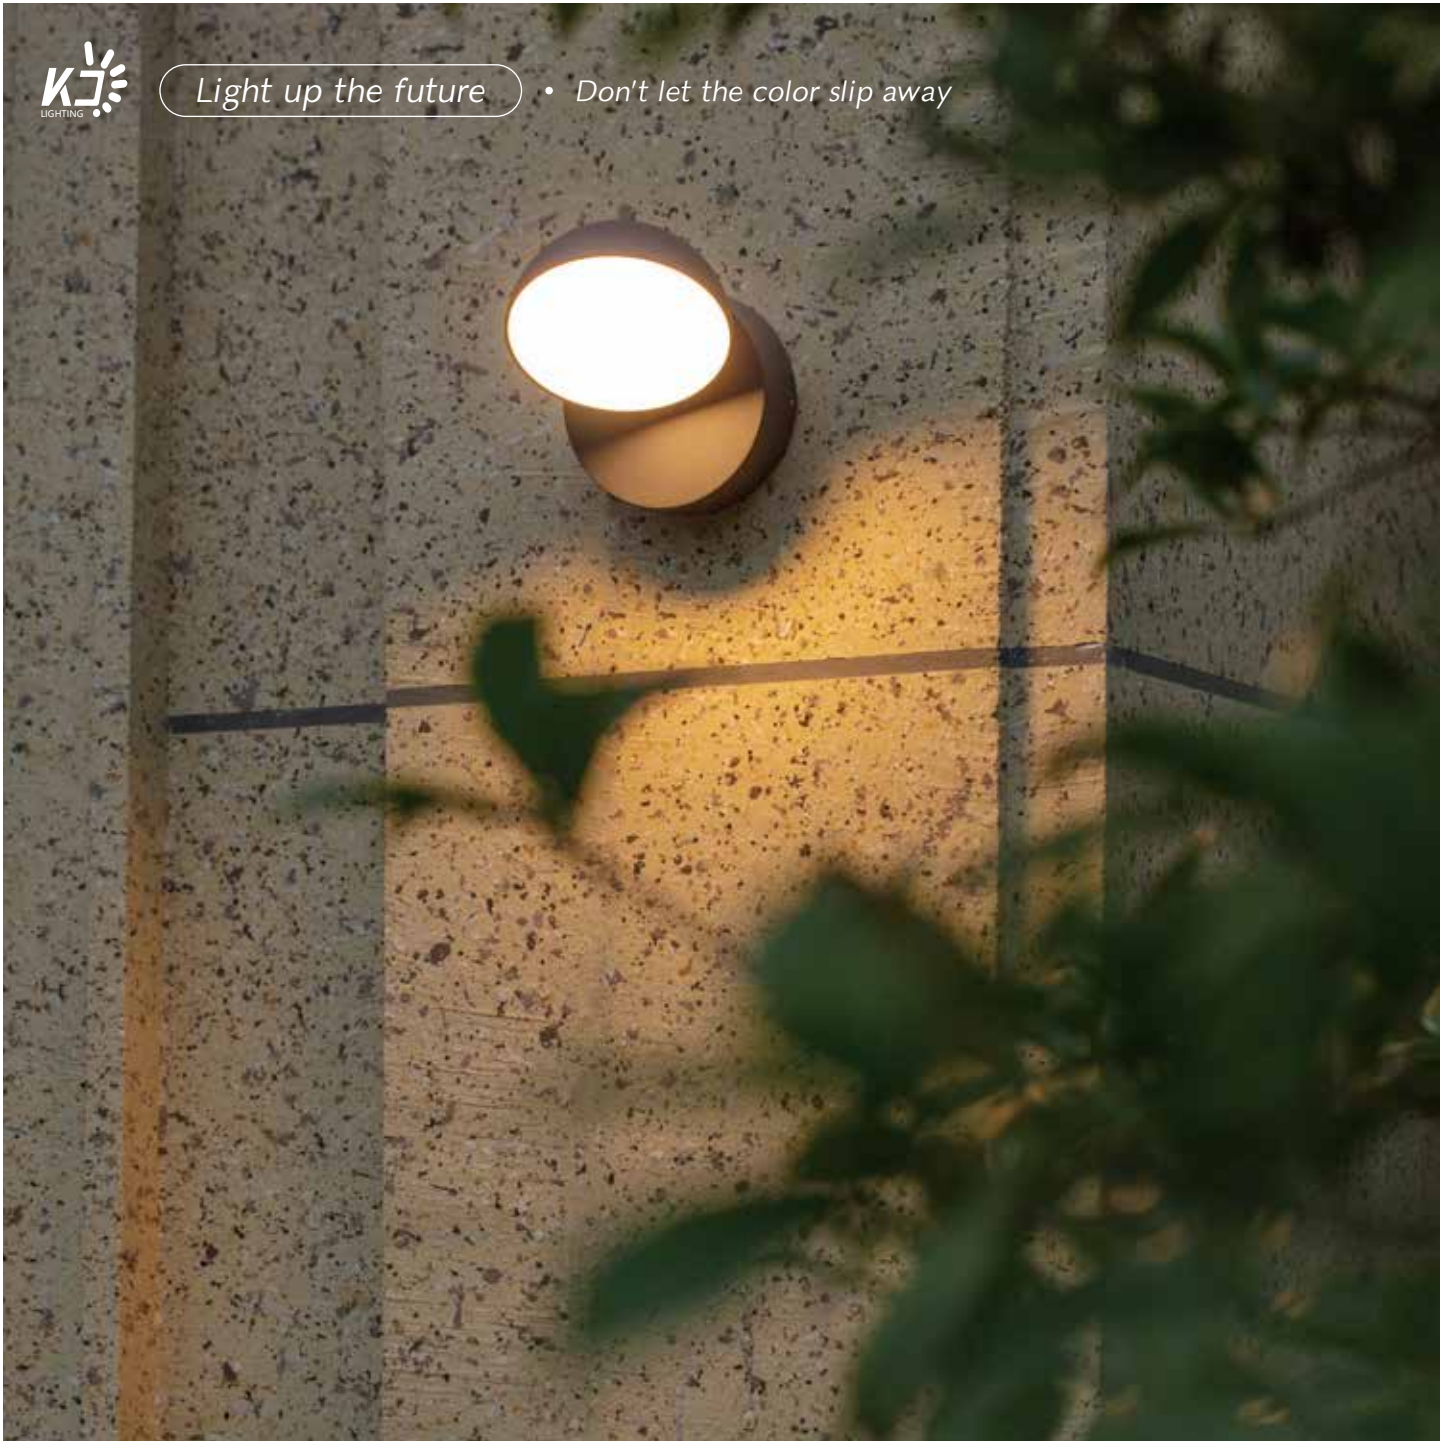

WM570



WM571



Item No.	WM570	WM571
Watt	LED SMD 12W	LED SMD 21W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	800lm	1600lm
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.82	≥0.9
Safety type	IP54 Class 1	IP54 Class 1

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
PC Diffuser
Silicon rubber gasket




Finishing Color


WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Lighting snapshot



Size

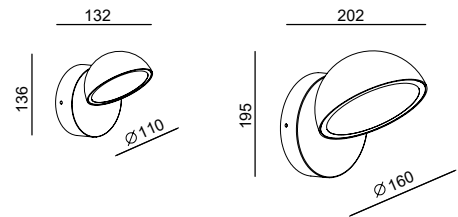

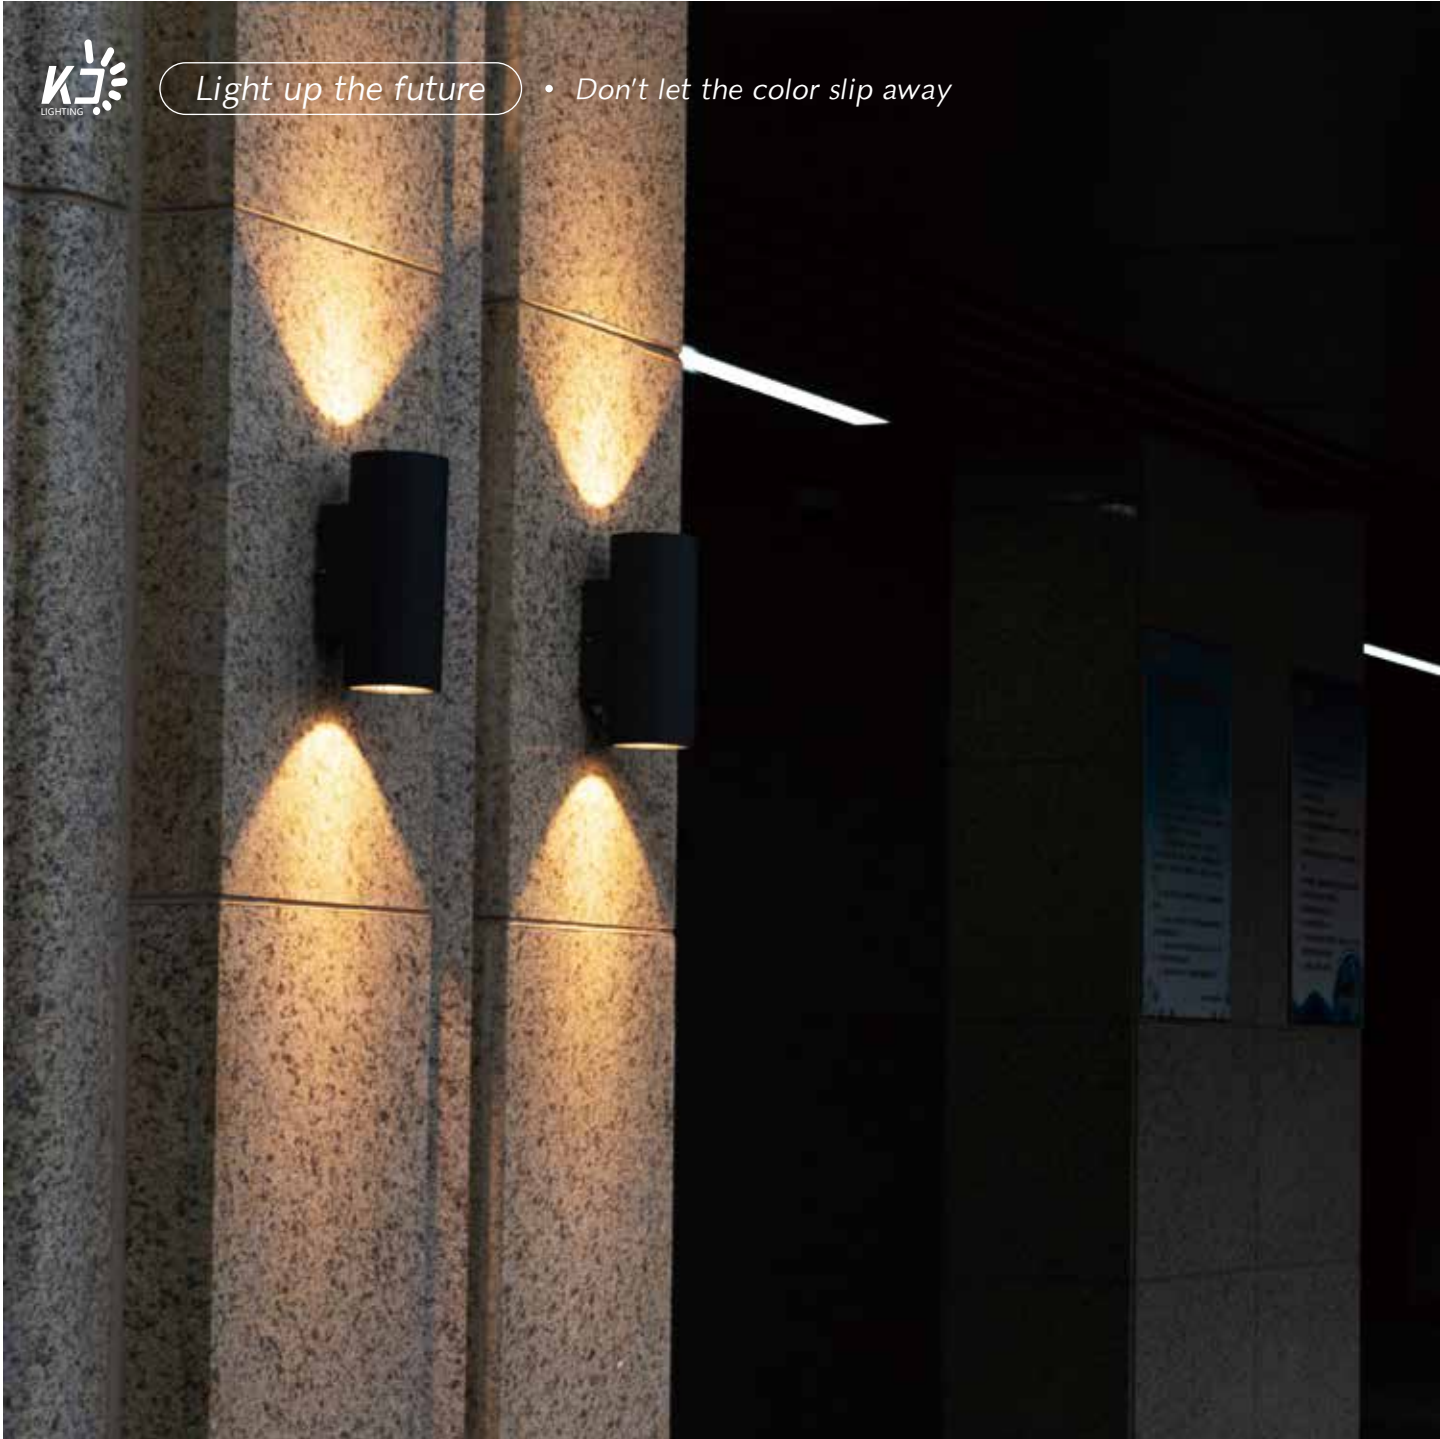

Item No.	WM005	WM006
Watt	LED COB 6W	LED COB 2×6W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	700lm(3000K)	1200lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.82
Safety type	IP65 Class I	IP65 Class I

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket




Finishing Color



Lighting snapshot



Size

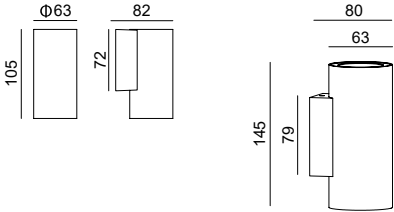



Light up the future • Don't let the color slip away




Item No.	WM007	WM008
Watt	LED COB 12W	LED COB 2×12W
Led Color Option	2700K~6500K	2700K-6500K
Luminous flux	1200lm(3000K)	2400lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.82	≥ 0.8
Safety type	IP65 Class I	IP65 Class I


Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⏚ CE RoHS

Finishing Color
WHITE
SILVER GREY
DARK GREY
BLACK
Size

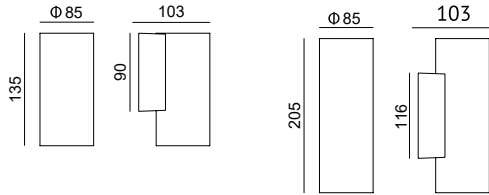

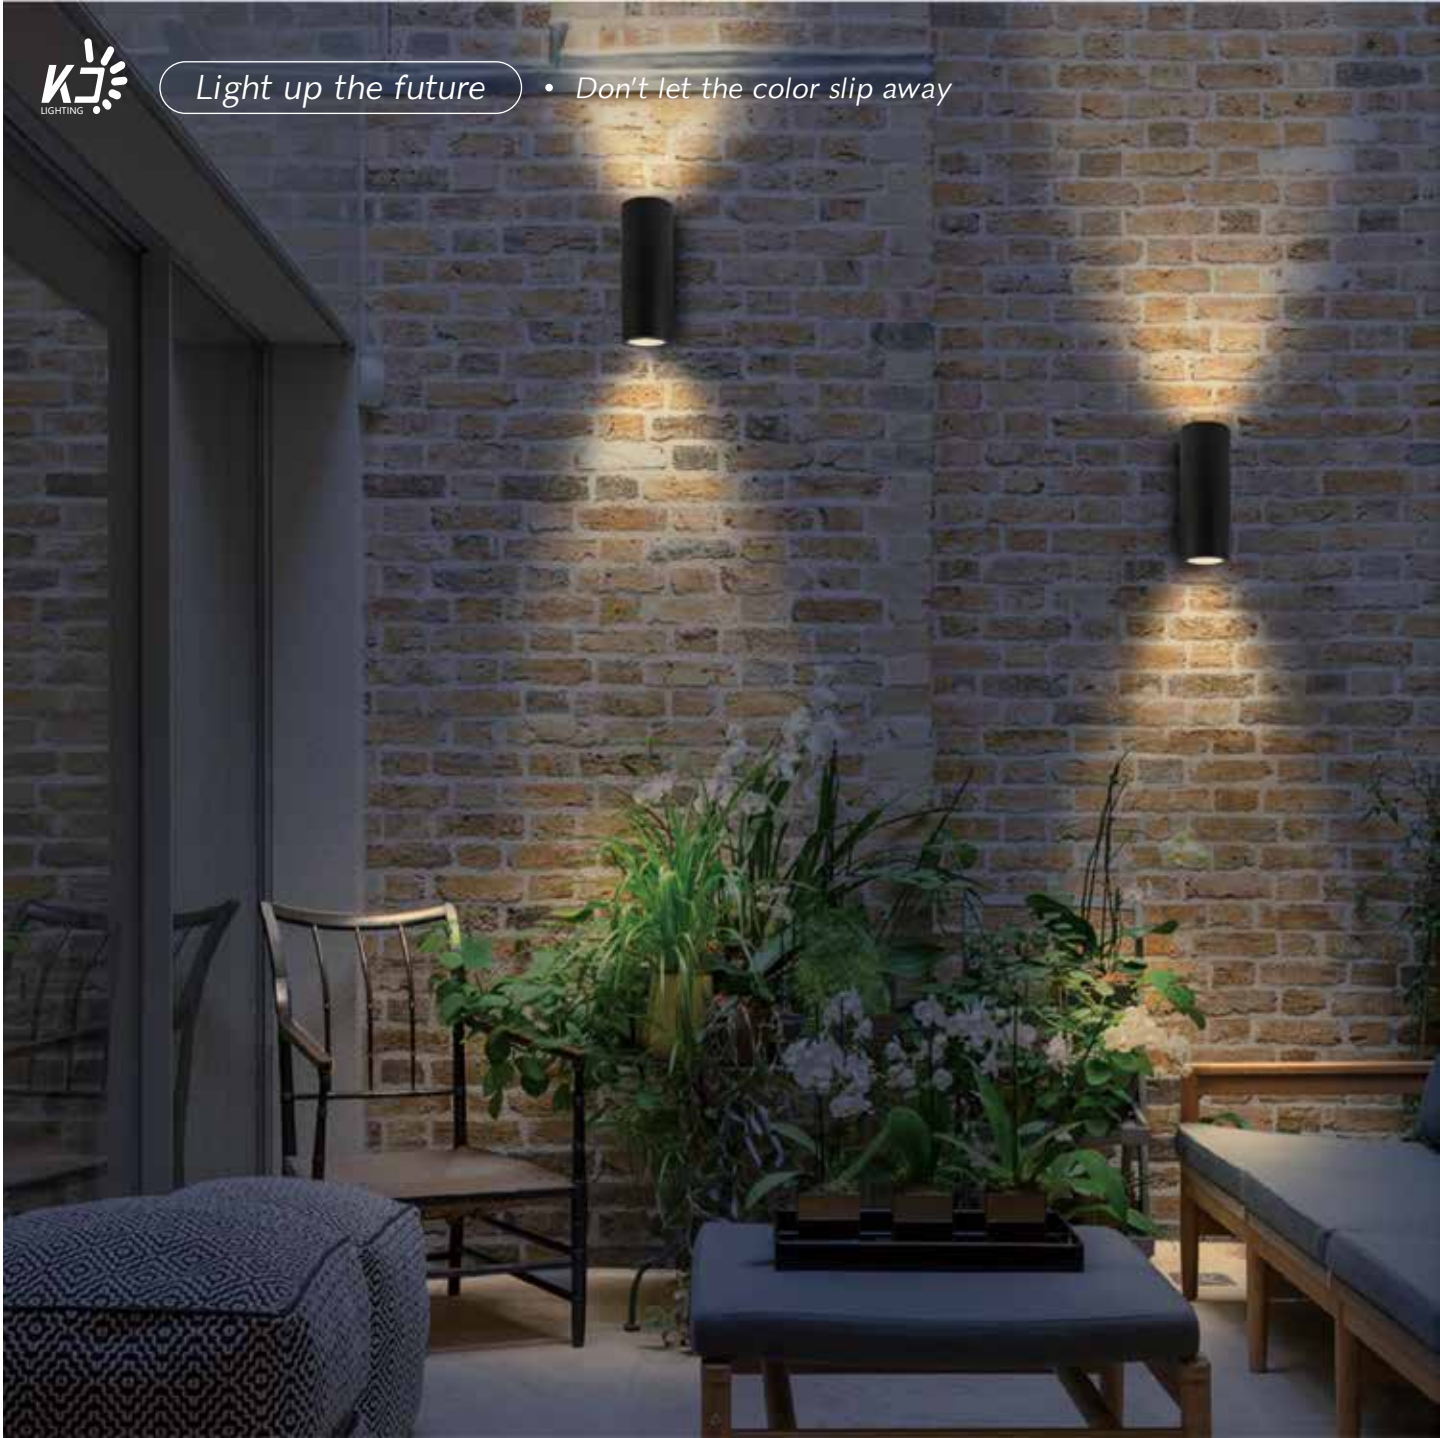

Light up the future • Don't let the color slip away



CM014



WM015



WM016

Item No.	CM014 / WM015	WM016
Watt	LED COB 13W / 18W	LED COB 2×18W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	1300lm / 1800lm(3000K)	3500lm(3000K)
Beam Angle	15°23°38°45°60°	15°23°38°45°60°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.82	≥0.8
Safety type	IP65 Class 1	IP65 Class 1


Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- PC Diffuser
- Silicon rubber gasket





Finishing Color
WHITE
SILVER GREY
DARK GREY
BLACK

Lighting snapshot



Size

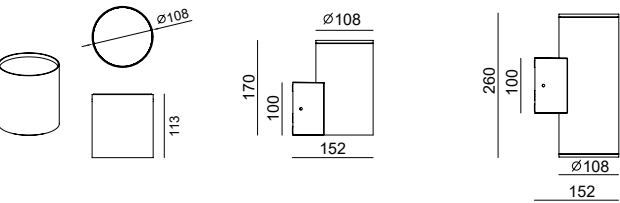

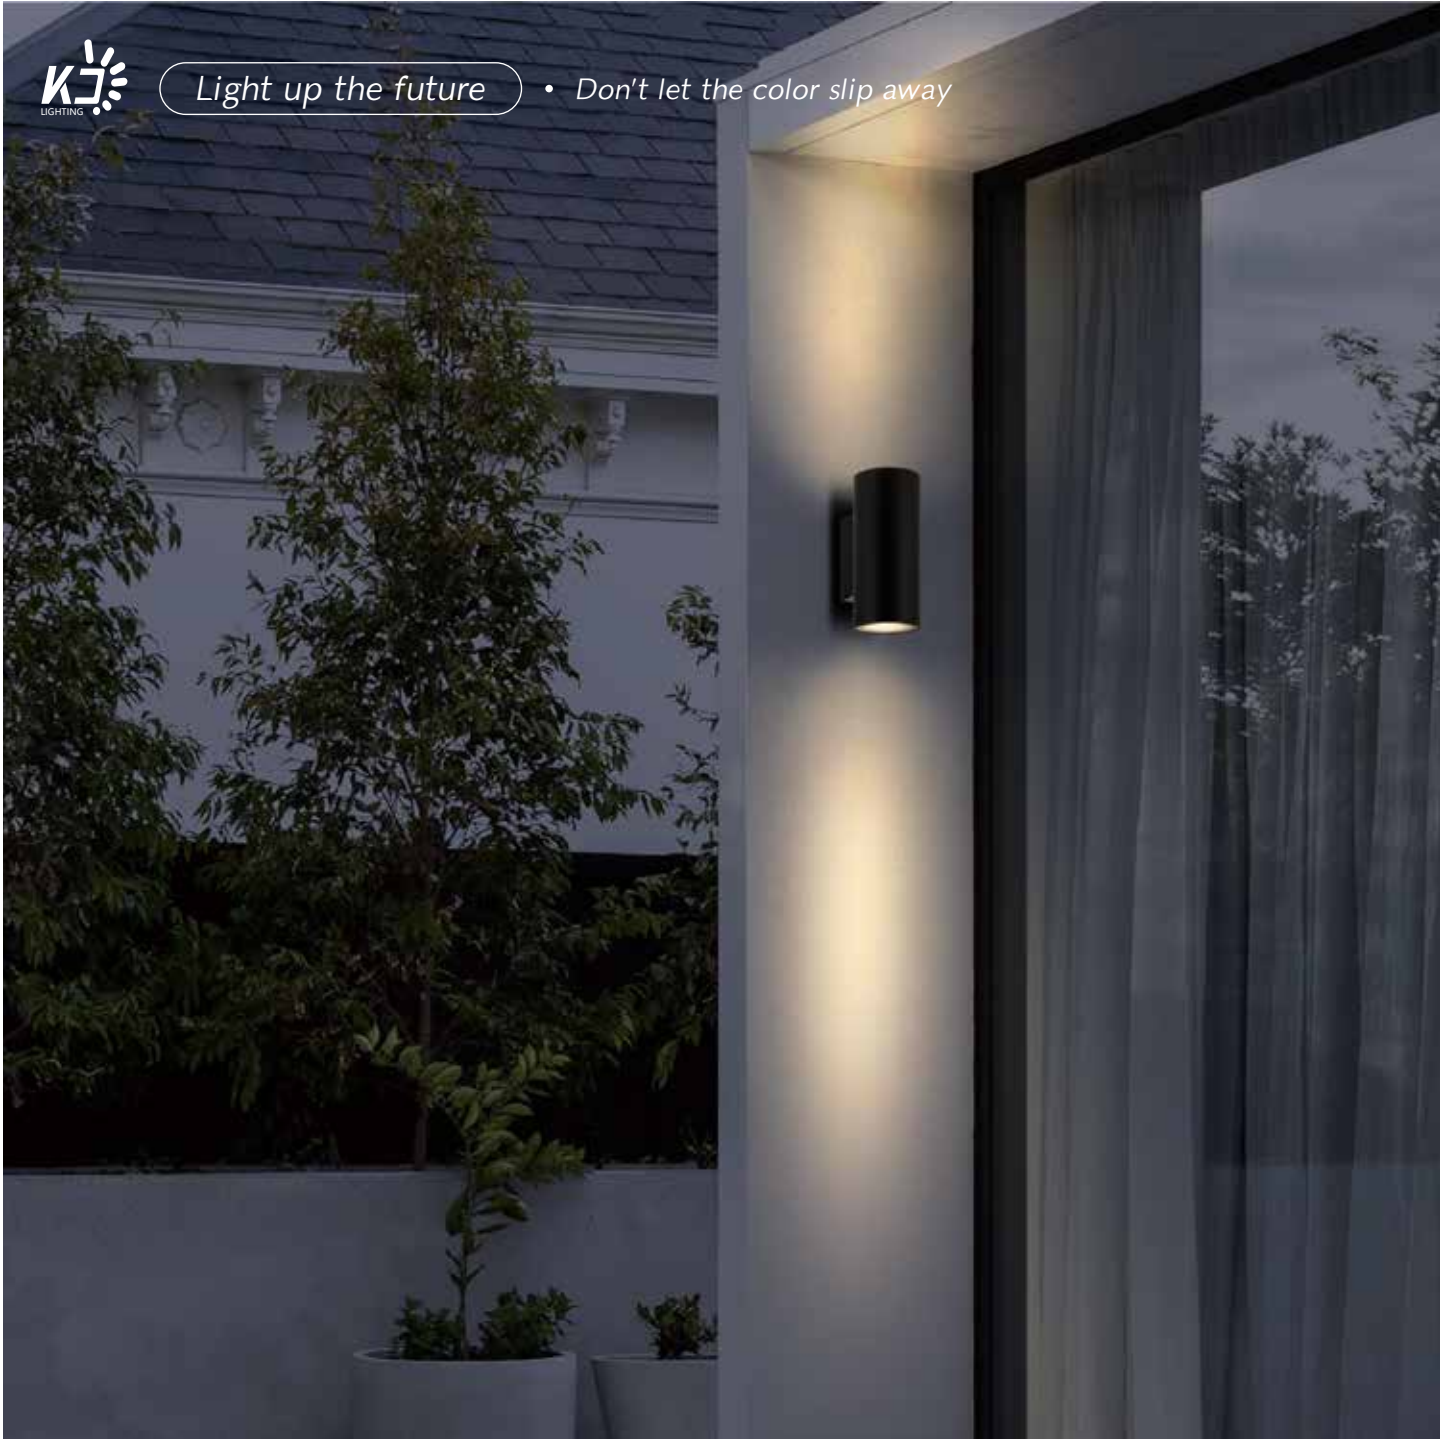

Light up the future • Don't let the color slip away



CM016



WM017



WM018



Item No.	CM016 / WM017	WM018
Watt	LED COB 7W / 12W	LED COB 2×12W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	580lm / 1000lm(3000K)	2000lm(3000K)
Beam Angle	15°23°38°45°60°	15°23°38°45°60°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.8 / ≥0.85	≥0.8
Safety type	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
PC Diffuser
Silicon rubber gasket



Finishing Color
WHITE
SILVER GREY
DARK GREY
BLACK

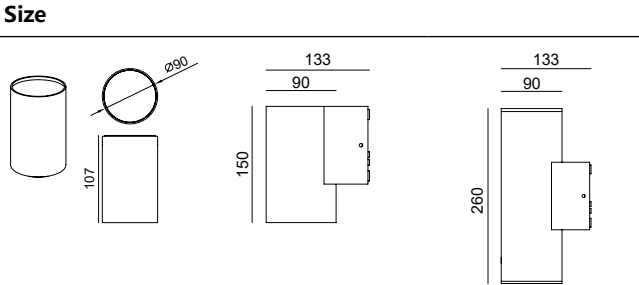



Light up the future • Don't let the color slip away



WM315

WM316

Item No.	WM315	WM316
Watt	LED COB 7W	LED COB 2×6W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	600lm(3000K)	1200lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	≥0.82
Safety type	IP65 Class 1	IP65 Class 1

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket




Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Lighting snapshot



Size

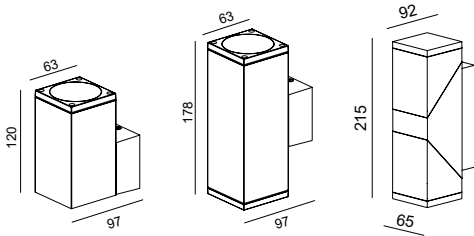



WM025



WM026



Item No.	WM025	WM026
Watt	LED COB 6W	LED COB 2×6W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	700lm(3000K)	700lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.82
Safety type	IP65 Class I	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

  RoHS

Finishing Color
WHITE
SILVER GREY
DARK GREY
BLACK
Size



WM027



WM028



Item No.	WM027	WM028
Watt	LED COB 12W	LED COB 2×12W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	1200lm(3000K)	1200lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.82	≥ 0.8
Safety type	IP65 Class I	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

  RoHS

Finishing Color
WHITE
SILVER GREY
DARK GREY
BLACK
Size





Light up the future • Don't let the color slip away



WM151



WM153



WM152



WM154

Item No.	WM151 / WM153	WM152 / WM154
Watt	GU10 Max.35W	GU10 2×Max.35W
Input	200-240V~ 50Hz	200-240V~ 50Hz
Safety type	IP65 Class 1	IP65 Class 1

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

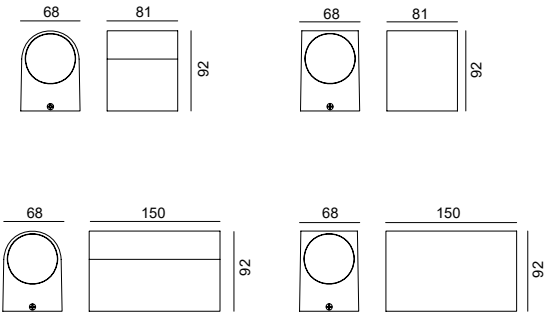



Light up the future • Don't let the color slip away



WM585



WM586



WM587



WM587-PIR

Item No.	WM585	WM586 / WM587 / WM578-PIR
Watt	GU10 Max.35W	GU10 2×Max.35W
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Safety type	IP65 Class I	IP65 Class I

Description



- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

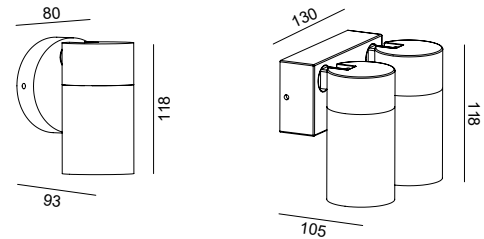



Light up the future • Don't let the color slip away



WM581



WM582



Item No.	WM581	WM582
Watt	LED COB 8W	LED COB 16W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	600lm(3000K)	1200lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.8
Safety type	IP65 Class I	IP65 Class I


Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	



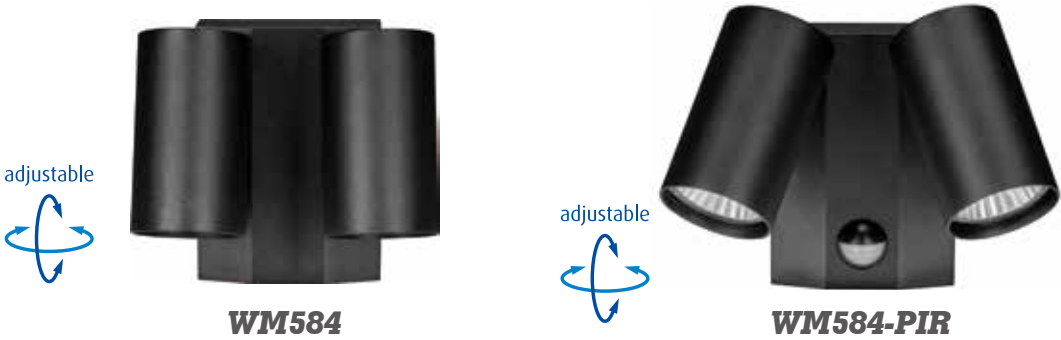


Item No.	WM584/WM584-PIR
Watt	LED COB 16W
Led Color Option	2700K~6500K
Luminous flux	1200lm(3000K)
Beam Angle	38°
CRI	80
Input	220-240V ~ 50Hz
Power factor	≥ 0.8
Safety type	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⏚ CE RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	





Light up the future • Don't let the color slip away



WM611



WM612



CM612

Item No.	WM611	WM612 / CM612
Watt	LED SMD 12W	E27 Max.60W
Led Color Option	2700K-6500K	/
Luminous flux	800lm(3000K)	/
Beam Angle	120°	/
CRI	80	/
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.82	/
Safety type	IP65 Class I	IP54 Class I

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

PC / GLASS diffuser

Silicon rubber gasket



Finishing Color


WHITE

SILVER GREY

DARK GREY

BLACK

Size

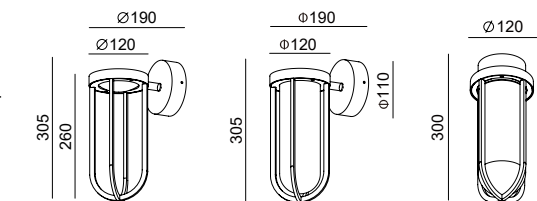



WM206



WM206-PIR



Item No.	WM206 / WM206-PIR
Watt	LED SMD 21W
Led Color Option	2700K~6500K
Luminous flux	1600lm(3000K)
Beam Angle	120°
CRI	80
Input	220-240V ~ 50Hz
Power factor	≥ 0.8
Safety type	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- PC Diffuser
- Silicon rubber gasket

⏚ CE RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	





WM157

WM158

Item No.	WM157	WM158
Watt	GU10 Max.35W	GU10 2×Max.35W
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Safety type	IP65 Class I	IP65 Class I

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⚡ CE RoHS

Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size





Light up the future • Don't let the color slip away



WM159

WM160

Item No.	WM159	WM160
Watt	E27 Max.55W	E27 2×Max.55W
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Safety type	IP54 Class I	IP54 Class I

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⚡ CE RoHS

Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size






Item No.	WM012	WM011	WM002	WM001
Watt	E27 2×Max 60W	E27 Max 60W	GU10 2×Max.35W	GU10 Max.35W
Input	220-240V~ 50Hz	220-240V~ 50Hz	220-240V~ 50Hz	220-240V~ 50Hz
Safety type	IP65 Class 1	IP65 Class 1	IP65 Class 1	IP65 Class 1
Description				
Die-cast aluminium Body				
Powder coated with pretreatment for outdoor use				
Glass Diffuser				
Silicon rubber gasket				
  RoHS				
Finishing Color				
WHITE				
SILVER GREY				
DARK GREY				
BLACK				

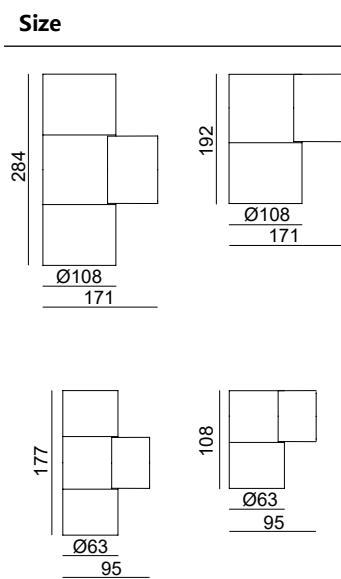

Item No.	WM111 / WM112	WM051 / WM052
Watt	E27 Max 60W	GU10 Max.35W
Input	220-240V~ 50Hz	220-240V~ 50Hz
Safety type	IP65 Class 1	IP54 Class 1
Description		
Die-cast aluminium Body		
Powder coated with pretreatment for outdoor use		
Glass Diffuser		
Silicon rubber gasket		
  RoHS		
Finishing Color		
WHITE		
SILVER GREY		
DARK GREY		
BLACK		

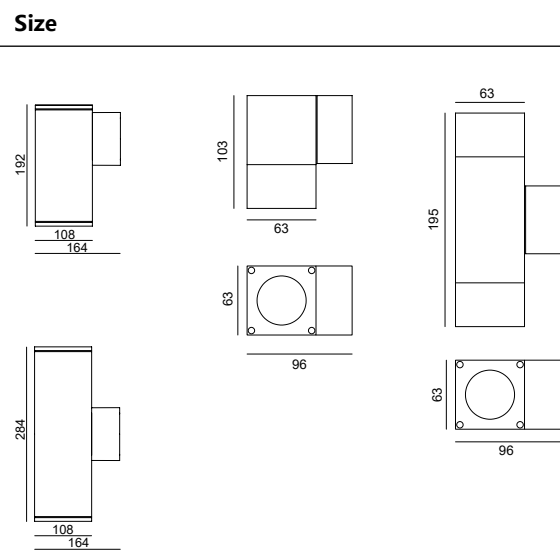



Light up the future • Don't let the color slip away



WM331



WM332

Item No.	WM331	WM332
Watt	LED SMD 7W	LED SMD 9W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	60lm(3000K)	120lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	≥0.8
Safety type	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

PC Diffuser


Silicon rubber gasket




Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Lighting snapshot



Size

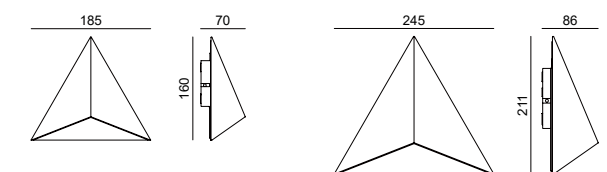



WM231



WM231-PIR

Item No.	WM231 / WM231-PIR
Watt	E27 Max.60W
Input	220-240V~ 50Hz
Safety type	IP44 Class 1


Description

Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket

  RoHS

Finishing Color	
	
	
	

Size

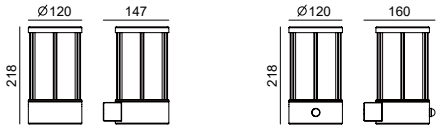



Light up the future • Don't let the color slip away



WM233



WM233-PIR

Item No.	WM233 / WM233-PIR
----------	-------------------


Watt	LED SMD 13W
Led Color Option	2700K-6500K
Luminous flux	800lm(3000K)
Beam Angle	120°
CRI	80
Input	220-240V ~ 50Hz
Power factor	≥0.82
Safety type	IP65 Class 1

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
PC Diffuser
Silicon rubber gasket




Finishing Color

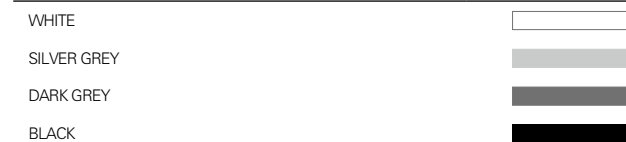

Lighting snapshot



Size

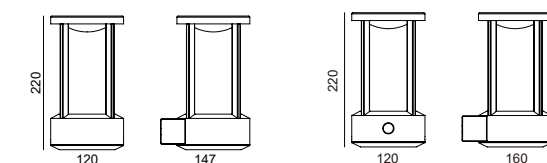



WM235


Item No.	WM235
Watt	E27 Max.8W
Input	220-240V ~ 50Hz
Safety type	IP44 Class 1

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⏚ CE RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	





Light up the future • Don't let the color slip away



WM182-II



WM183-II

Item No.	WM182-II	WM183-II
Watt	LED SMD 7W	LED SMD 12W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	400lm(3000K)	800m(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.82
Safety type	IP65 Class I	IP65 Class I

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

Glass Diffuser


Silicon rubber gasket



Finishing Color


WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size

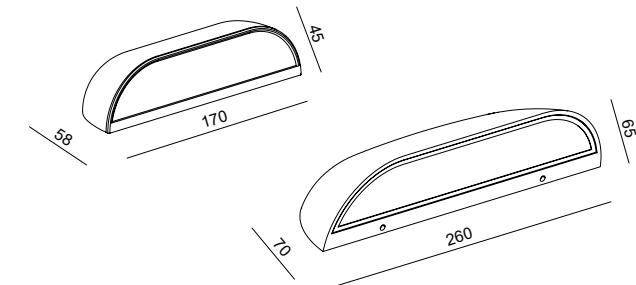



Light up the future • Don't let the color slip away



WM193



WM194



WM197

Item No.	WM193 / WM194	WM197
Watt	LED SMD 6W	LED SMD 10W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	200lm(3000K)	400lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.8
Safety type	IP65 Class I	IP65 Class I

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

PC Diffuser


Silicon rubber gasket



Finishing Color



WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size

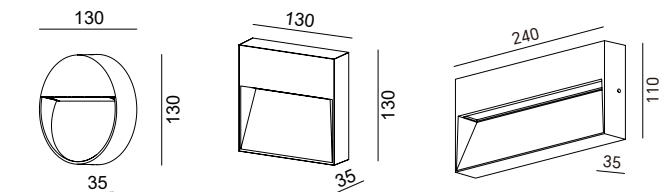



Light up the future • Don't let the color slip away

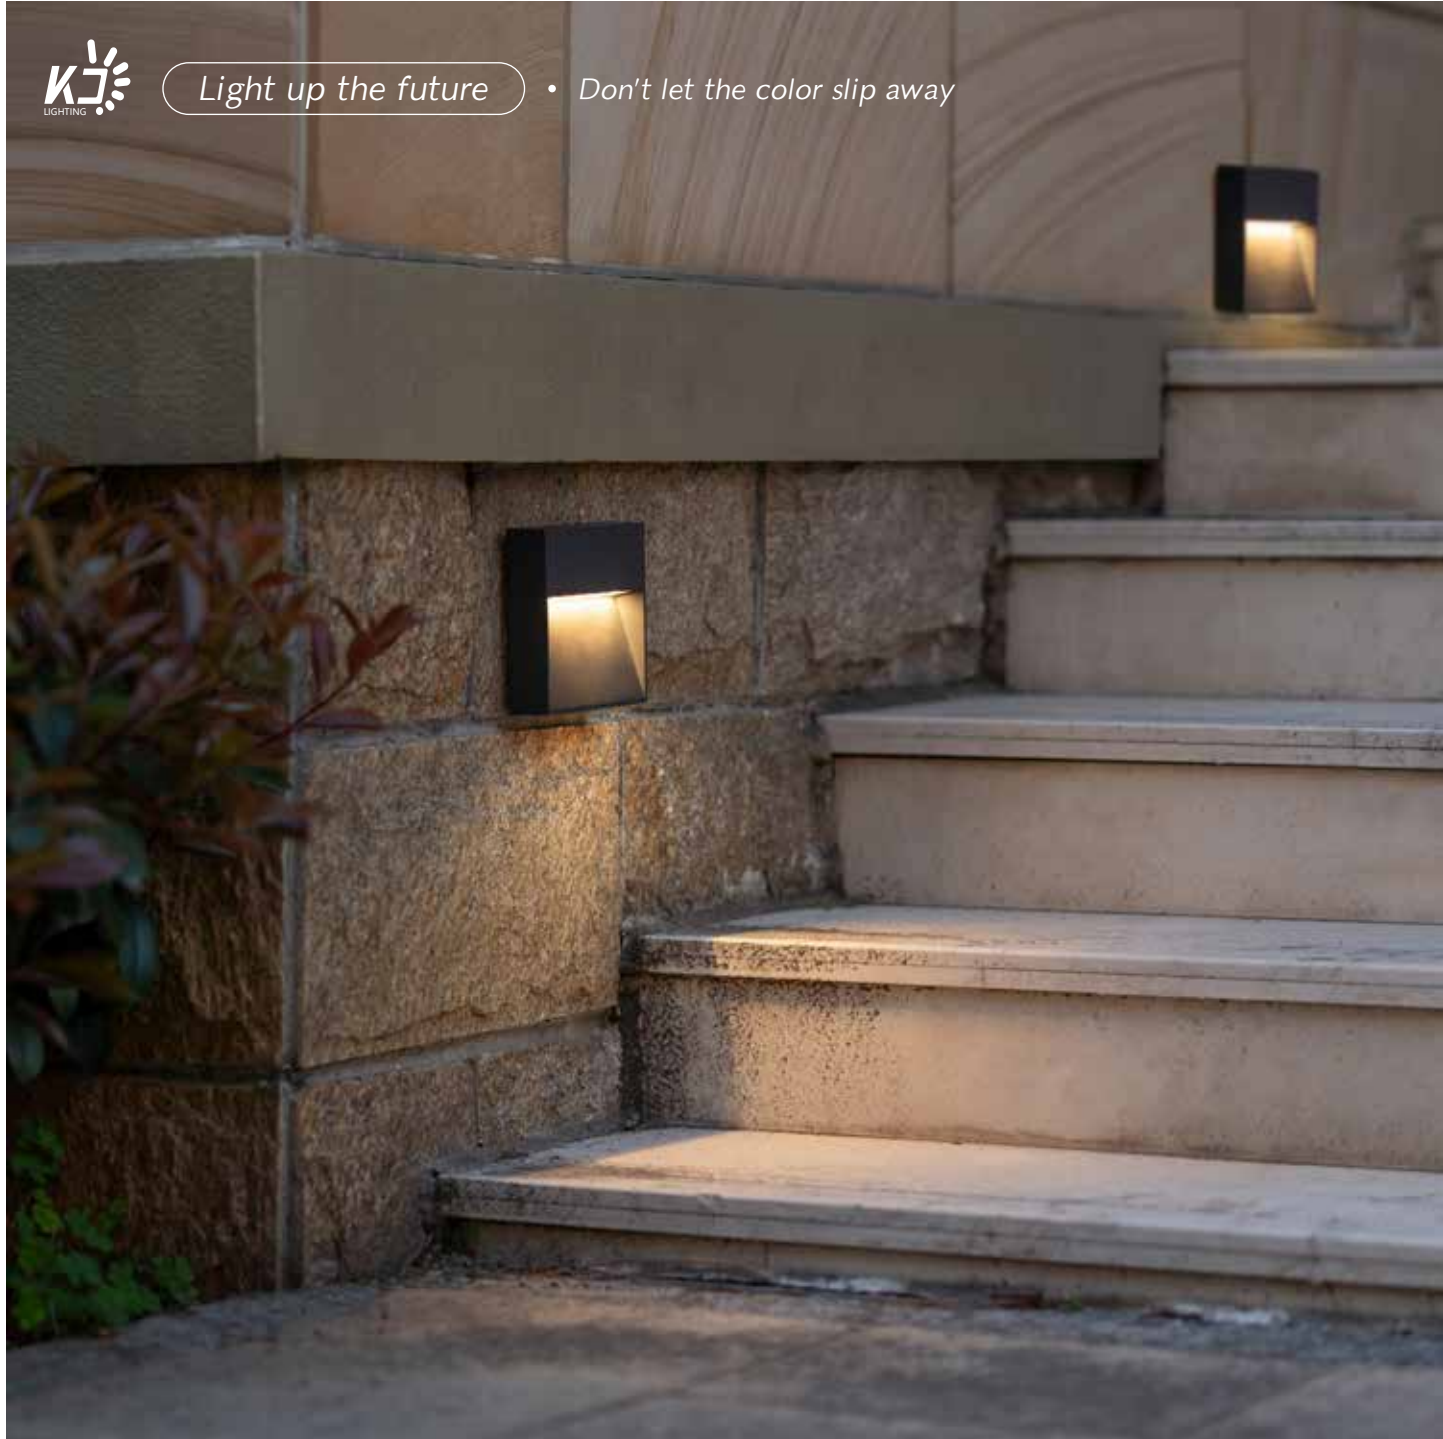

WM195



WM196



WM198


Item No.	WM195	WM196	WM198
Watt	LED SMD 12W	LED SMD 12W	LED SMD 10W
Led Color Option	2700K-6500K	2700K-6500K	2700K-6500K
Luminous flux	600lm(3000K)	600lm(3000K)	650lm(3000K)
Beam Angle	120°	120°	120°
CRI	80	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.82	≥ 0.82	≥ 0.9
Safety type	IP65 Class I	IP65 Class I	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- PC Diffuser
- Silicon rubber gasket



Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	

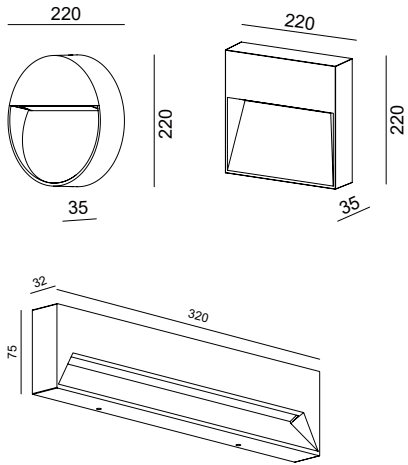




Item No.	CM063	CM064
Watt	LED SMD 21W	LED SMD 36W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	1800lm(3000K)	3000lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.9
Safety type	IP65 Class I	IP65 Class I


Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- PC Diffuser
- Silicon rubber gasket



Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	

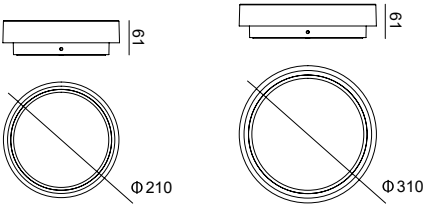

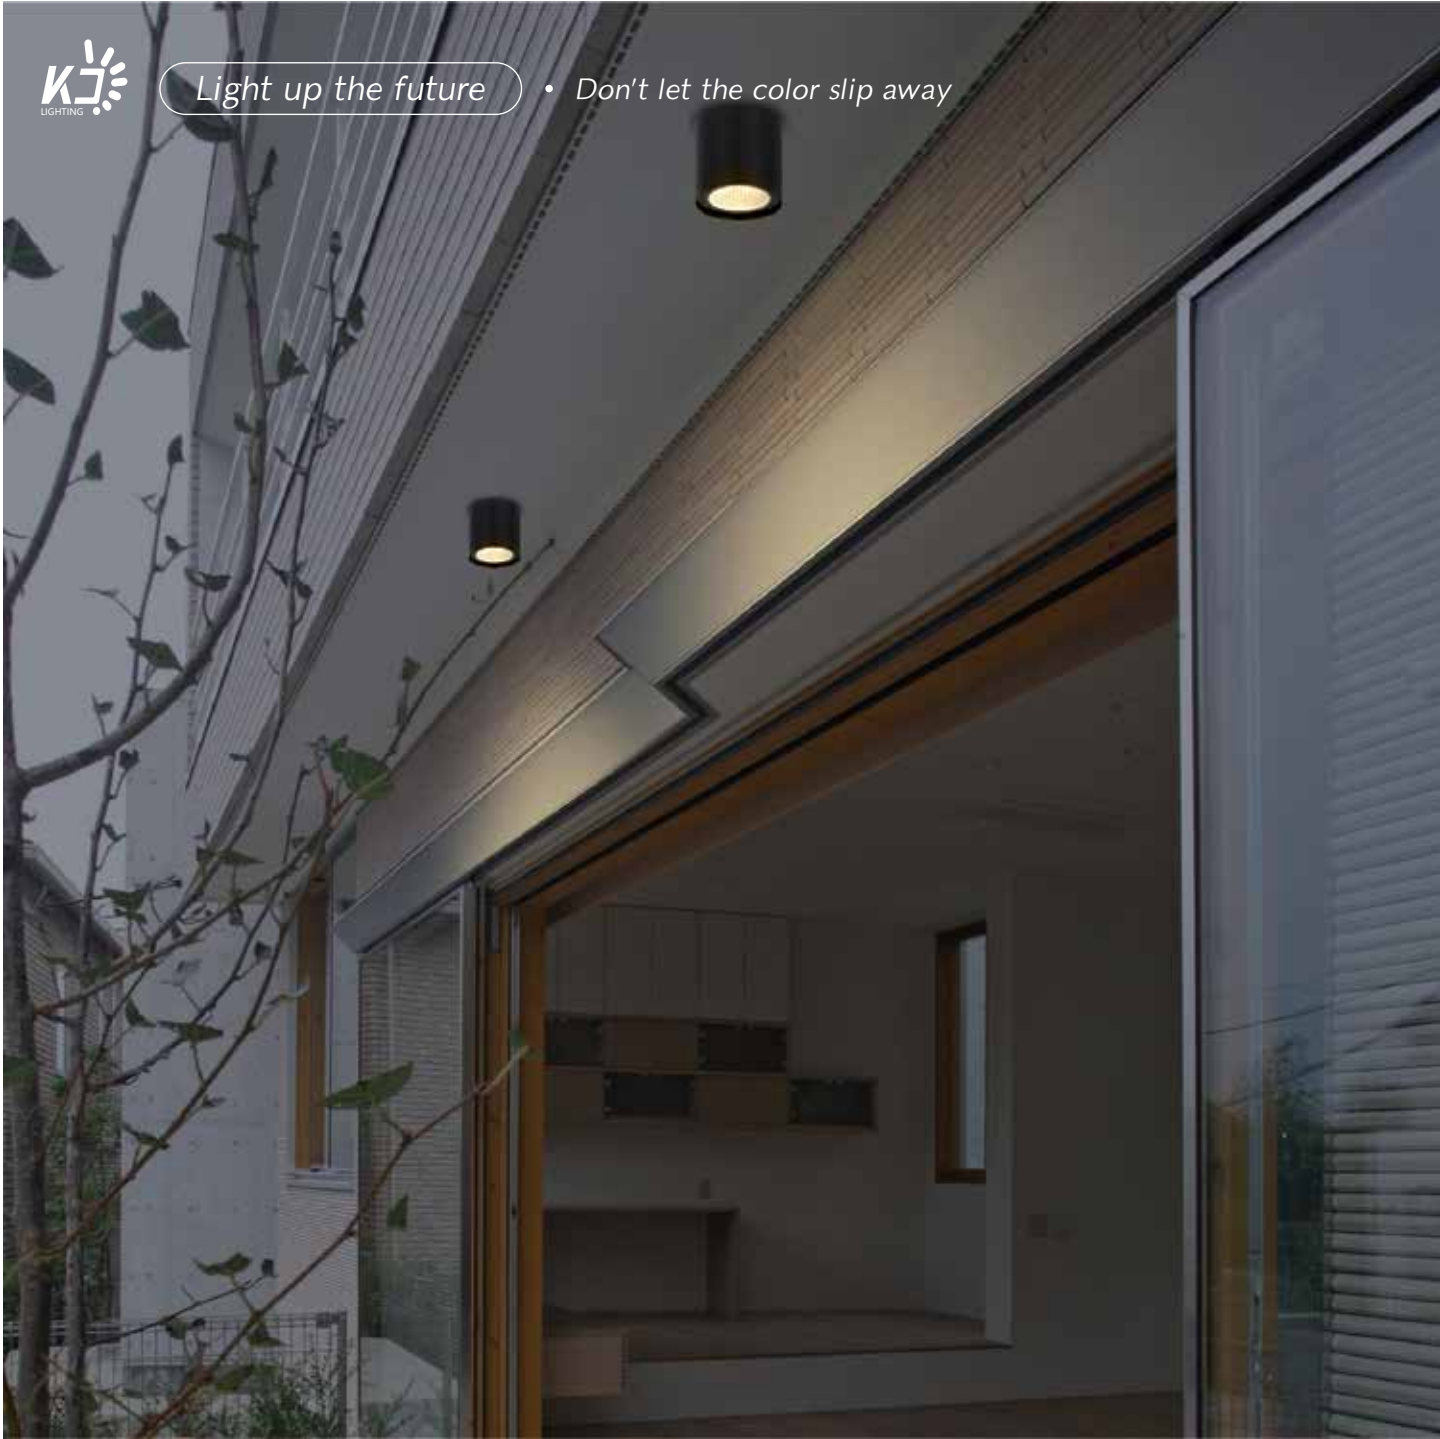

Light up the future • Don't let the color slip away



CM113



CM114

Item No.	CM113	CM114
Watt	LED COB 7W	LED COB 20W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	580lm(3000K)	2000lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	≥0.8
Safety type	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket





Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Lighting snapshot



Size



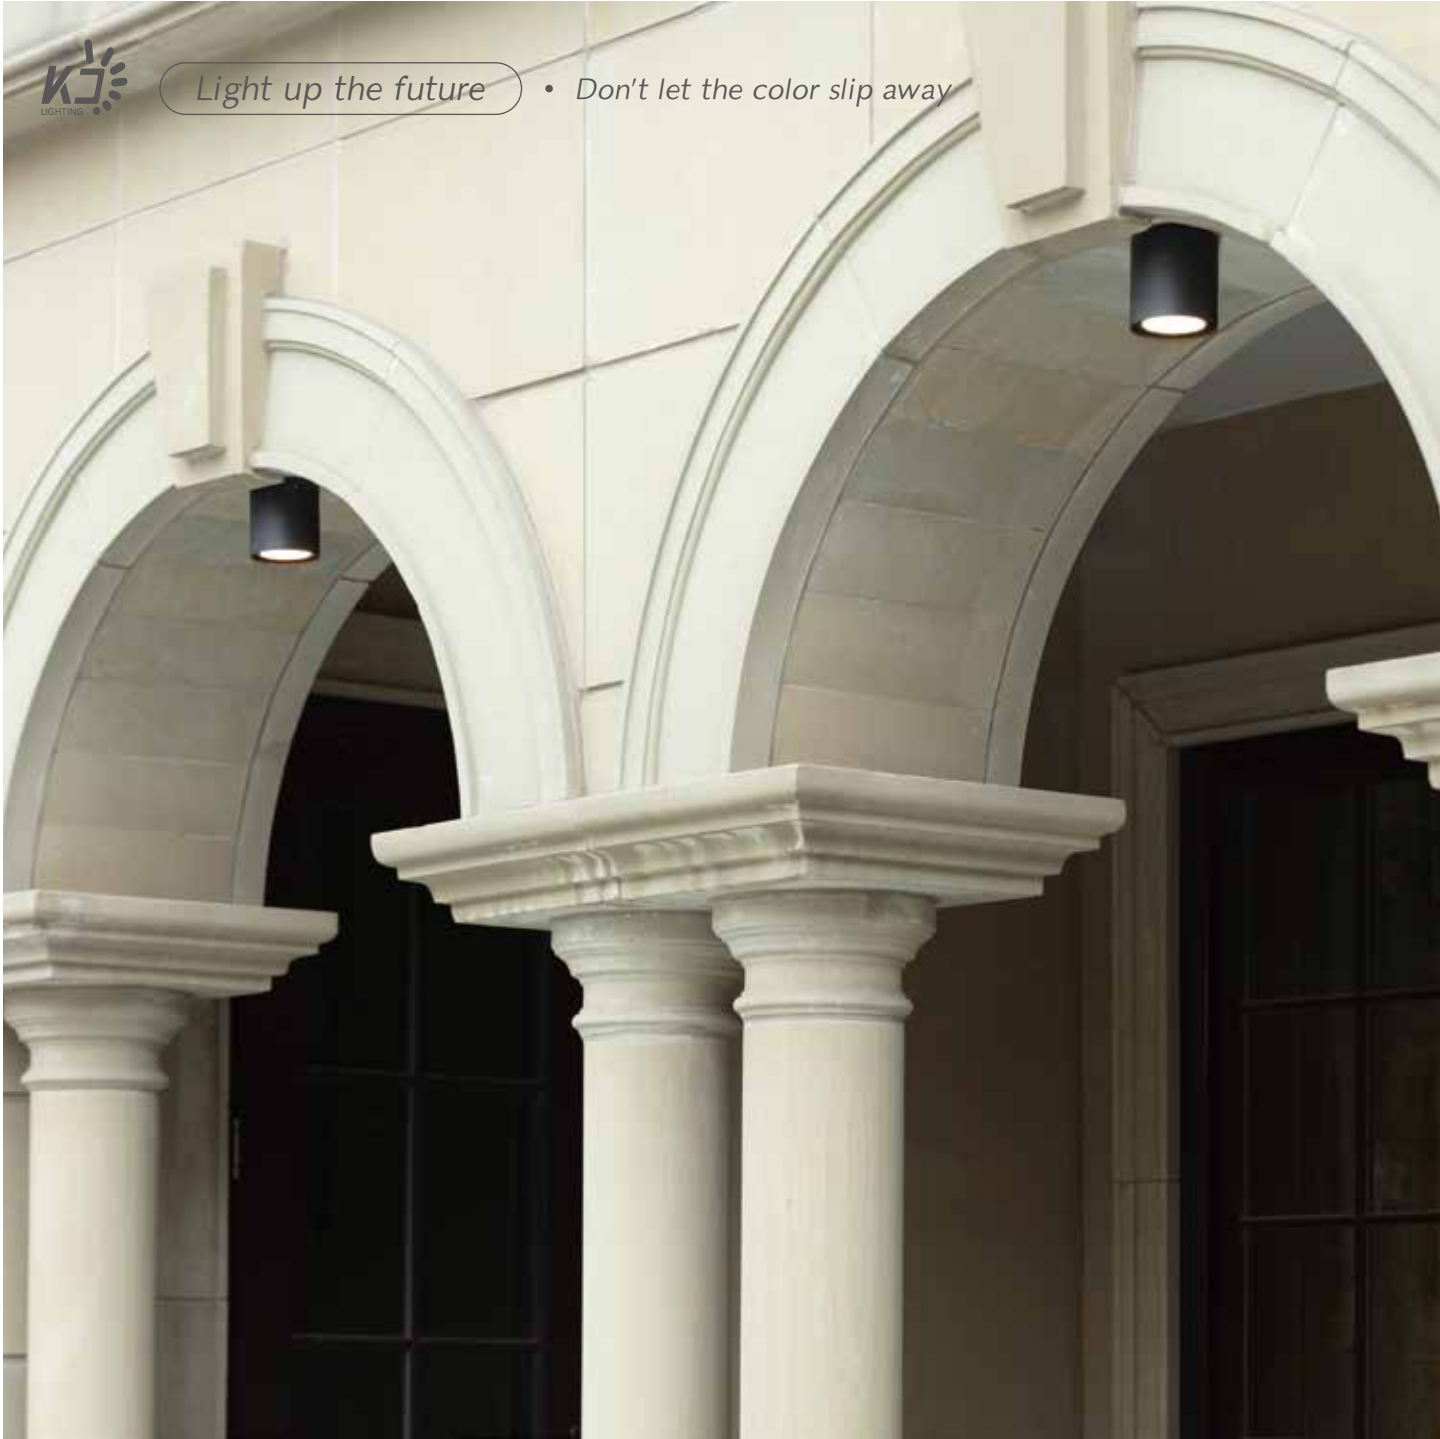

CM003



CM016



CM014

Item No.	CM003	CM016	CM014
Watt	LED COB 7W	LED COB 12W	LED COB 20W
Led Color Option	2700K~6500K	2700K~6500K	2700K~6500K
Luminous flux	580lm(3000K)	1100lm(3000K)	2000lm(3000K)
Beam Angle	38°	38°	38°
CRI	80	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	≥0.82	≥0.9
Safety type	IP65 Class 1	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket




Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Lighting snapshot



Size

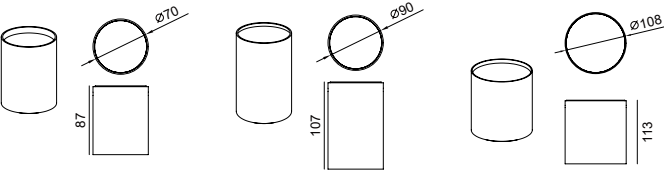



WM631



B631



Item No.	WM631	B631
Watt	LED SMD 12W	LED SMD 12W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	800m(3000K)	800m(3000K)
Beam Angle	360°	360°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.92	≥ 0.92
Safety type	IP65 Class I	IP65 Class I

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

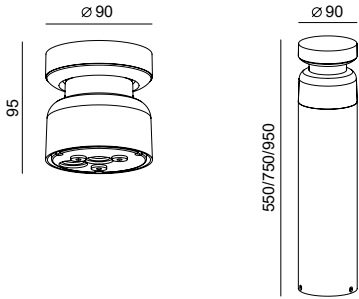



Light up the future • Don't let the color slip away

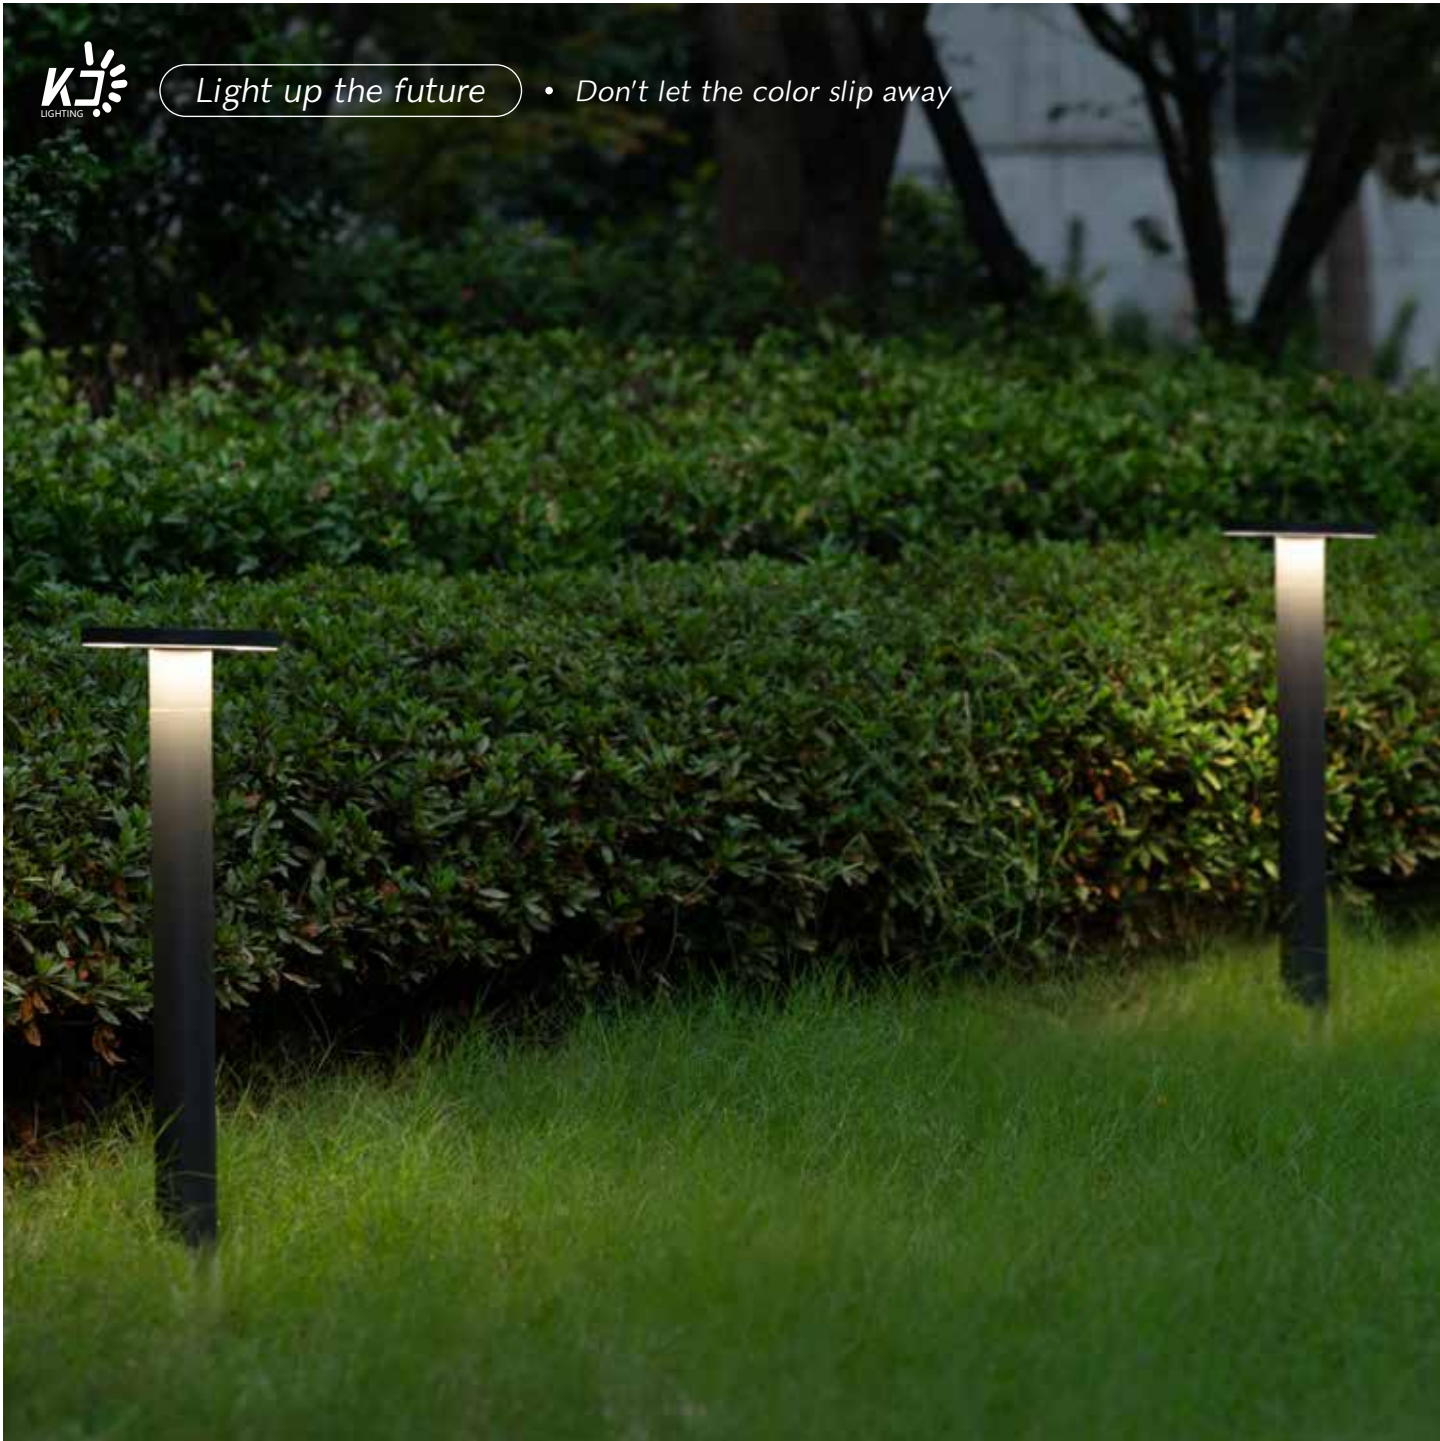

Item No.	WM621	B621
Watt	LED SMD 21W	SMD LED 21W
Led Color Option	2700K~6500K	2700K-6500K
Luminous flux	1800lm(3000K)	1800lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V~ 50Hz	220-240V ~ 50Hz
Power factor	≥0.9	≥ 0.9
Safety type	IP65 Class 1	IP65 Class I

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
PC Diffuser
Silicon rubber gasket

CE RoHS

Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

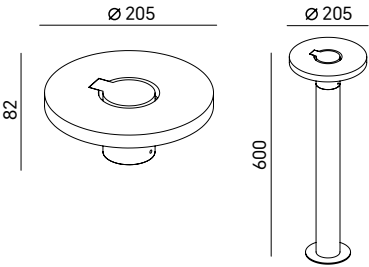



Light up the future • Don't let the color slip away

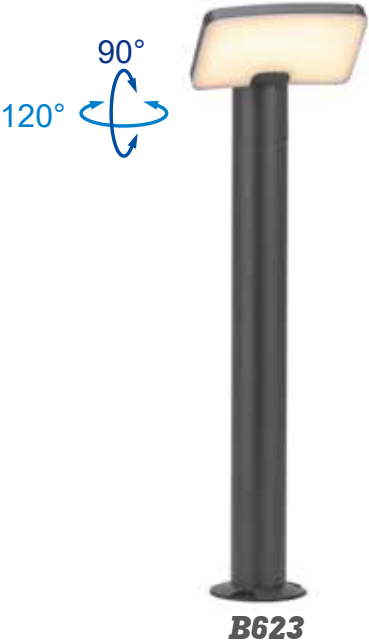

Item No.	B623
Watt	LED SMD 21W
Led Color Option	3000K-6500K CCT
Luminous flux	2000lm(3000K)
Beam Angle	120°
CRI	80
Input	220-240V ~ 50Hz
Power factor	≥ 0.8
Safety type	IP65 Class I

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
PC Diffuser
Silicon rubber gasket



Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size





Light up the future • Don't let the color slip away



Item No.	B601	B602
Watt	LED 8W	LED 12W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	580lm(3000K)	820lm(3000K)
Beam Angle	68°	68°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.82
Safety type	IP65 Class I	IP65 Class I

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
PC Diffuser
Silicon rubber gasket

  RoHS

Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK
- 

Size

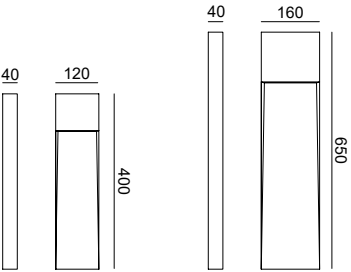



Light up the future • Don't let the color slip away



B603-400 B603-600 B603-800


Item No.	B603
Watt	LED COB 12W
Led Color Option	2700K-6500K
Luminous flux	800lm(3000K)
Beam Angle	120°
CRI	80
Input	220-240V ~ 50Hz
Power factor	≥ 0.82
Safety type	IP65 Class I


Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	

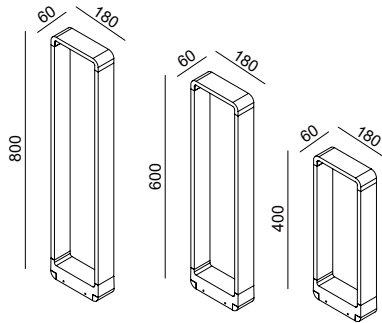

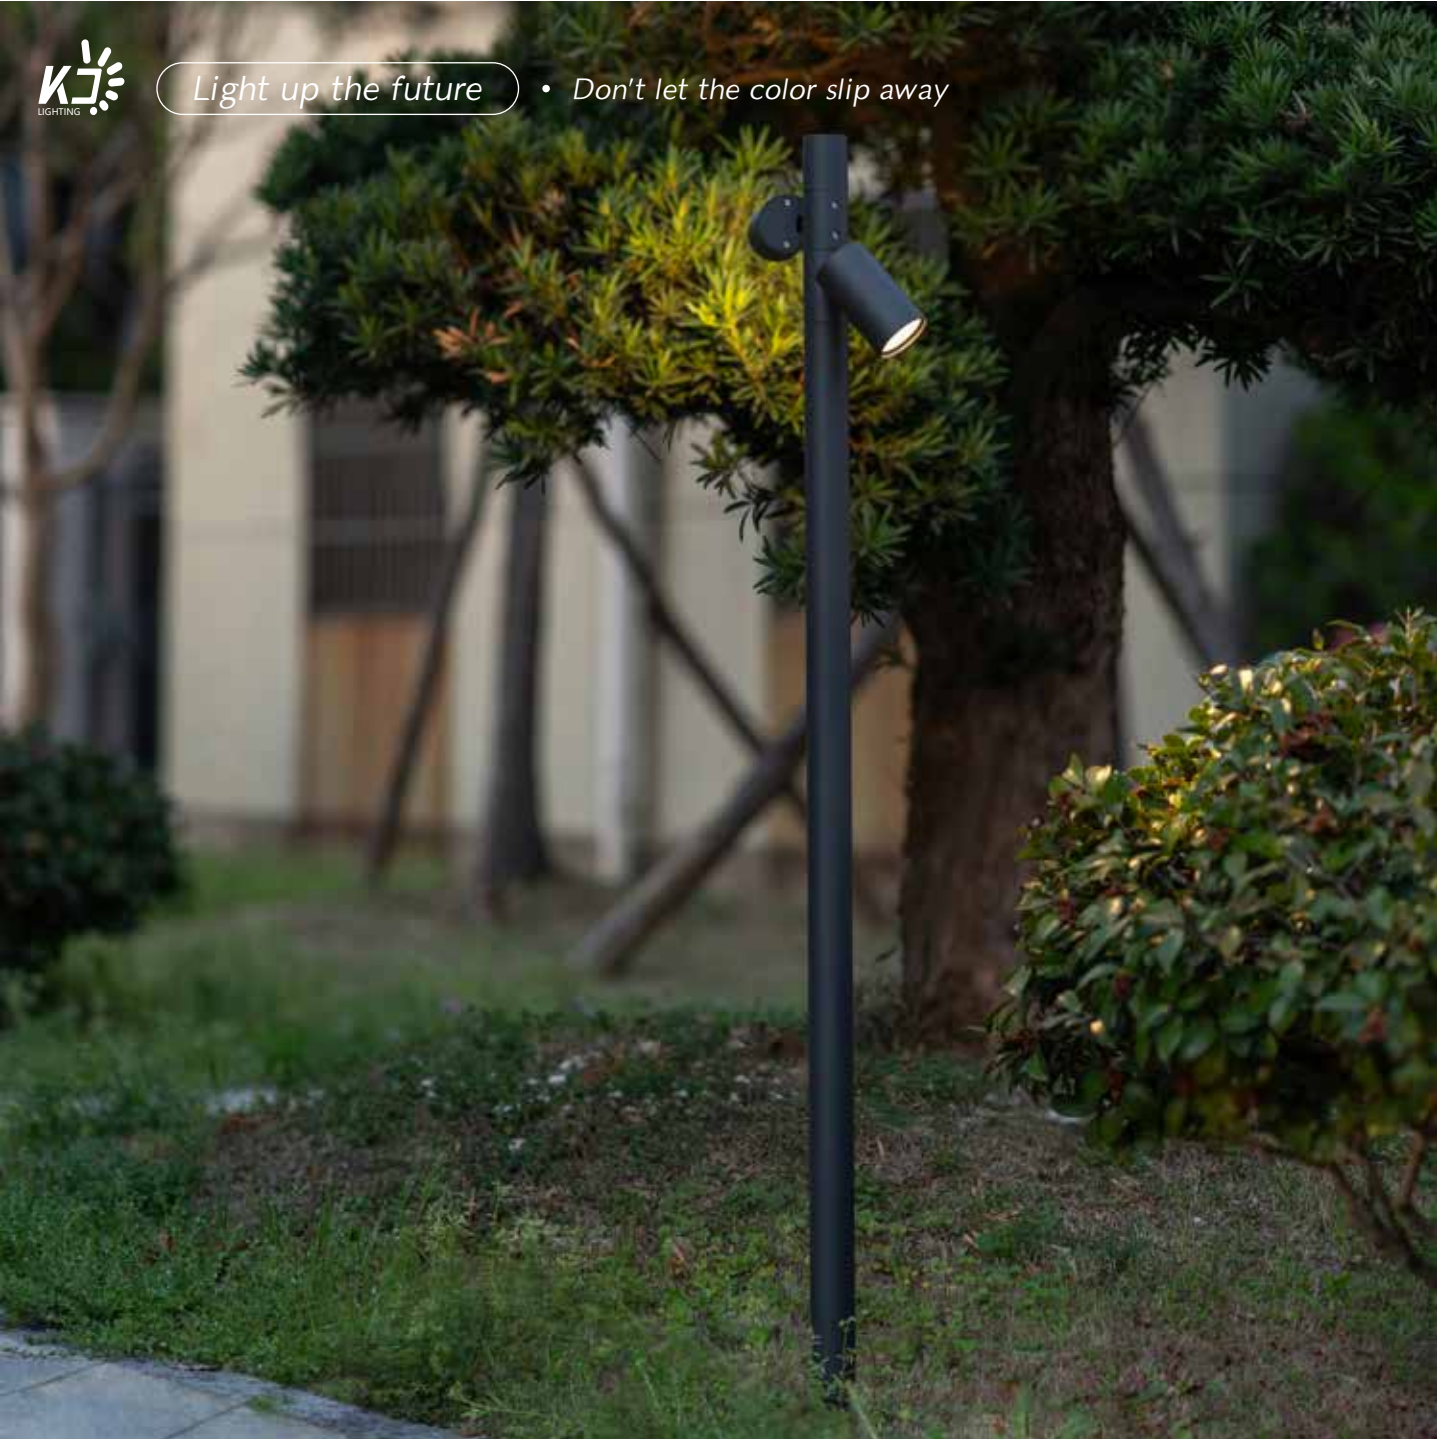

Item No.	B582	B582-GU
Watt	LED COB 2×6W	GU10 Max.35W
Led Color Option	2700K-6500K	/
Luminous flux	800lm(3000K)	/
Beam Angle	38°	/
CRI	80	/
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.82	/
Safety type	IP65 Class I	IP65 Class I

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket



Finishing Color


WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size





Light up the future • Don't let the color slip away



B583-600 **B583-800**

Item No.	B583
Watt	LED COB 12W
Led Color Option	2700K-6500K
Luminous flux	800lm(3000K)
Beam Angle	38°
CRI	80
Input	220-240V ~ 50Hz
Power factor	≥ 0.82
Safety type	IP65 Class I

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket



Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size





Light up the future • Don't let the color slip away



B591



B592

Item No.	B591	B592
Watt	COB 8W	COB 2×8W
Led Color Option	2700K~6500K	2700K-6500K
Luminous flux	600 lm(3000K)	1200lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.8
Safety type	IP65 Class I	IP65 Class I

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color


- WHITE 
- SILVER GREY 
- DARK GREY 
- BLACK 

Size





Light up the future • Don't let the color slip away

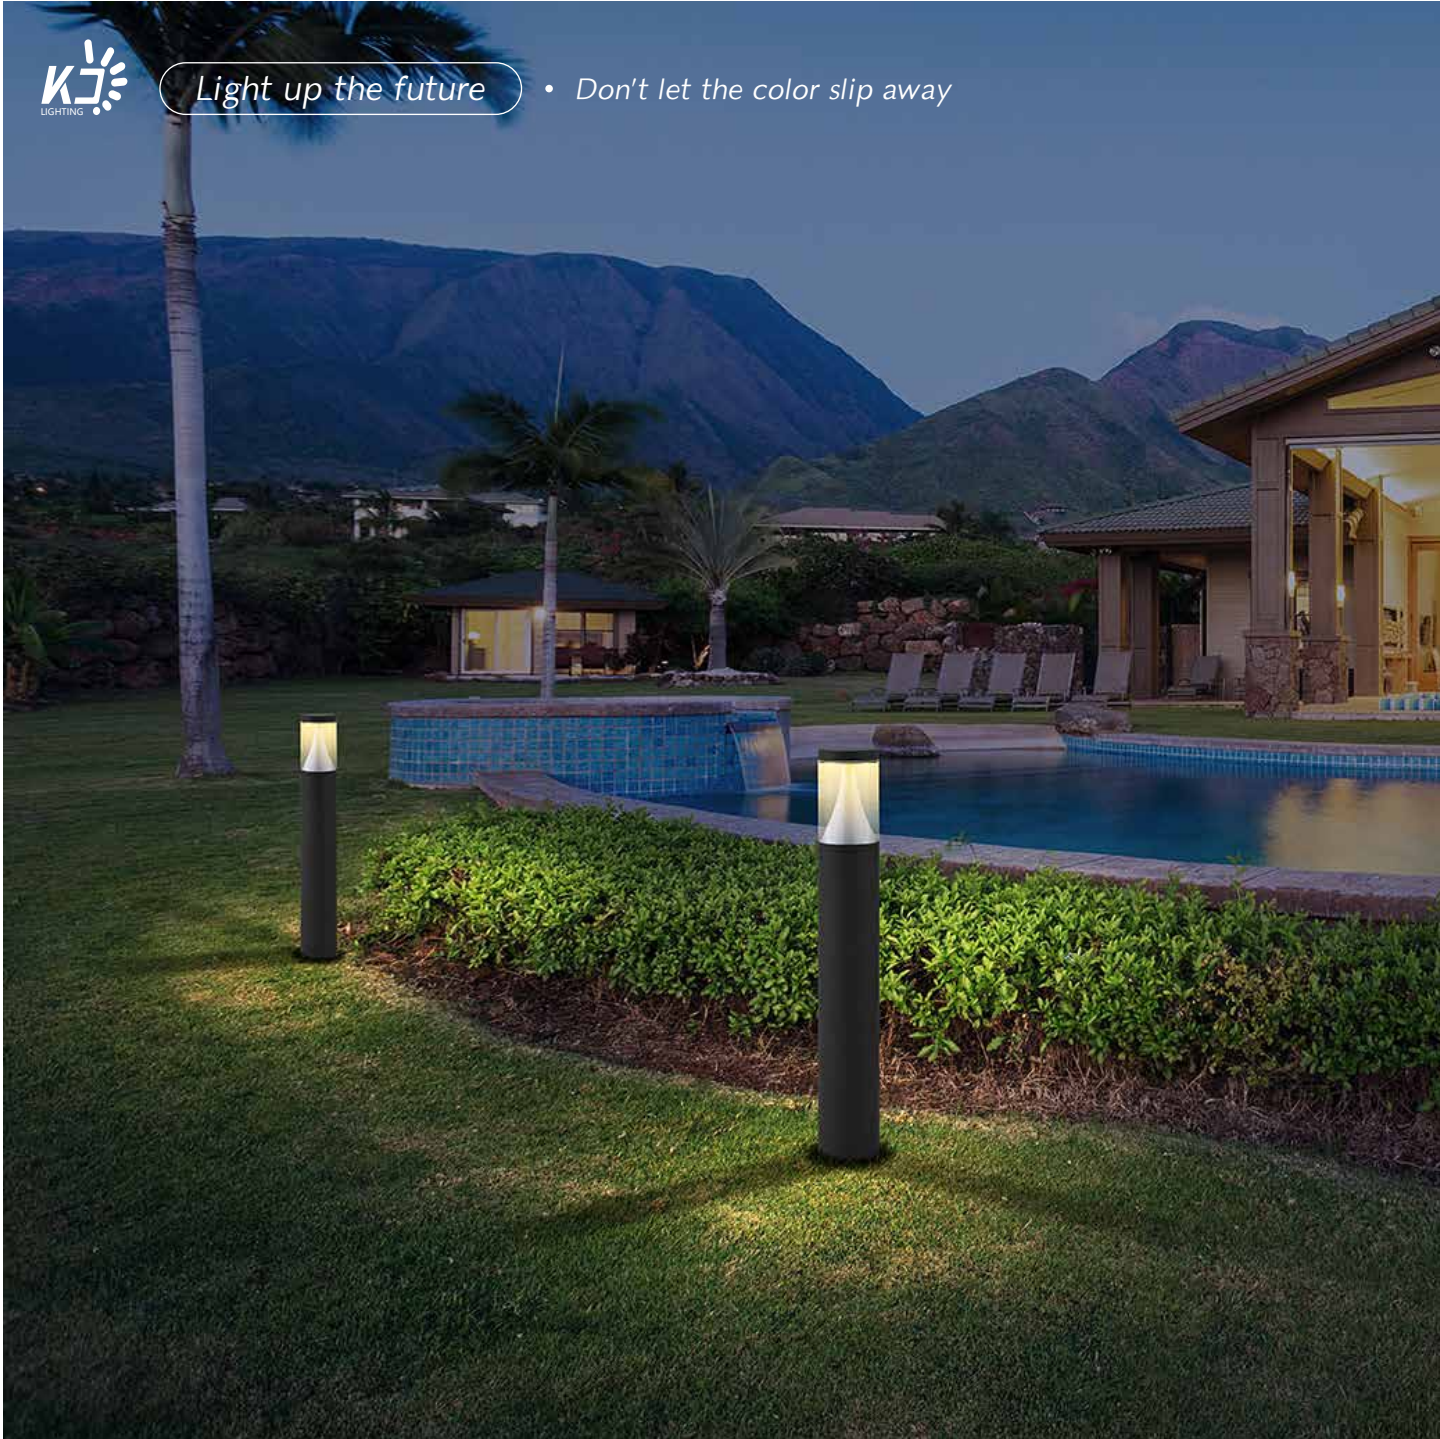

B212

B213

Item No.	B212	B213
Watt	LED SMD 12W	LED SMD 22W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	900lm(3000K)	1900lm(3000K)
Beam Angle	360°	360°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.82	≥ 0.8
Safety type	IP65 Class I	IP65 Class I

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket



Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

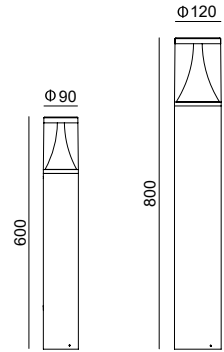



B231



B231-500



B231-800

Item No.	B231 / B231-500 / B231-800
Watt	E27 Max 60W
Input	220-240V~ 50Hz
Safety type	IP44 Class 1

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket



Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

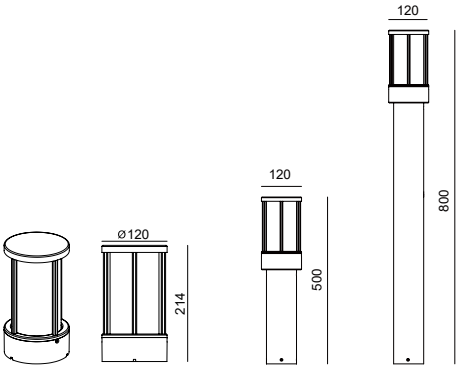



Light up the future • Don't let the color slip away



B234



B233-800



B233-800-PIR

Item No.	B234 / B233-800 / B233-800-PIR
Watt	LED SMD 13W
Led Color Option	2700K~6500K
Luminous flux	800lm(3000K)
Beam Angle	360°
CRI	80
Input	220-240V~ 50Hz
Power factor	≥0.82
Safety type	IP65 Class 1

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
PC Diffuser
Silicon rubber gasket




Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size

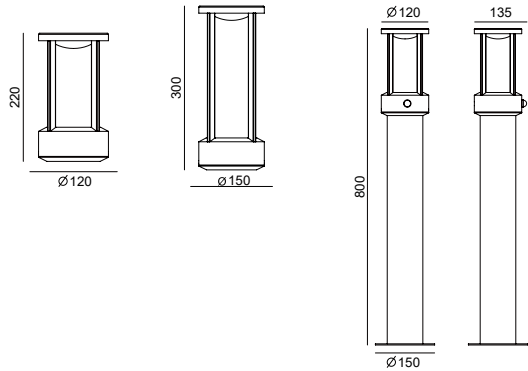

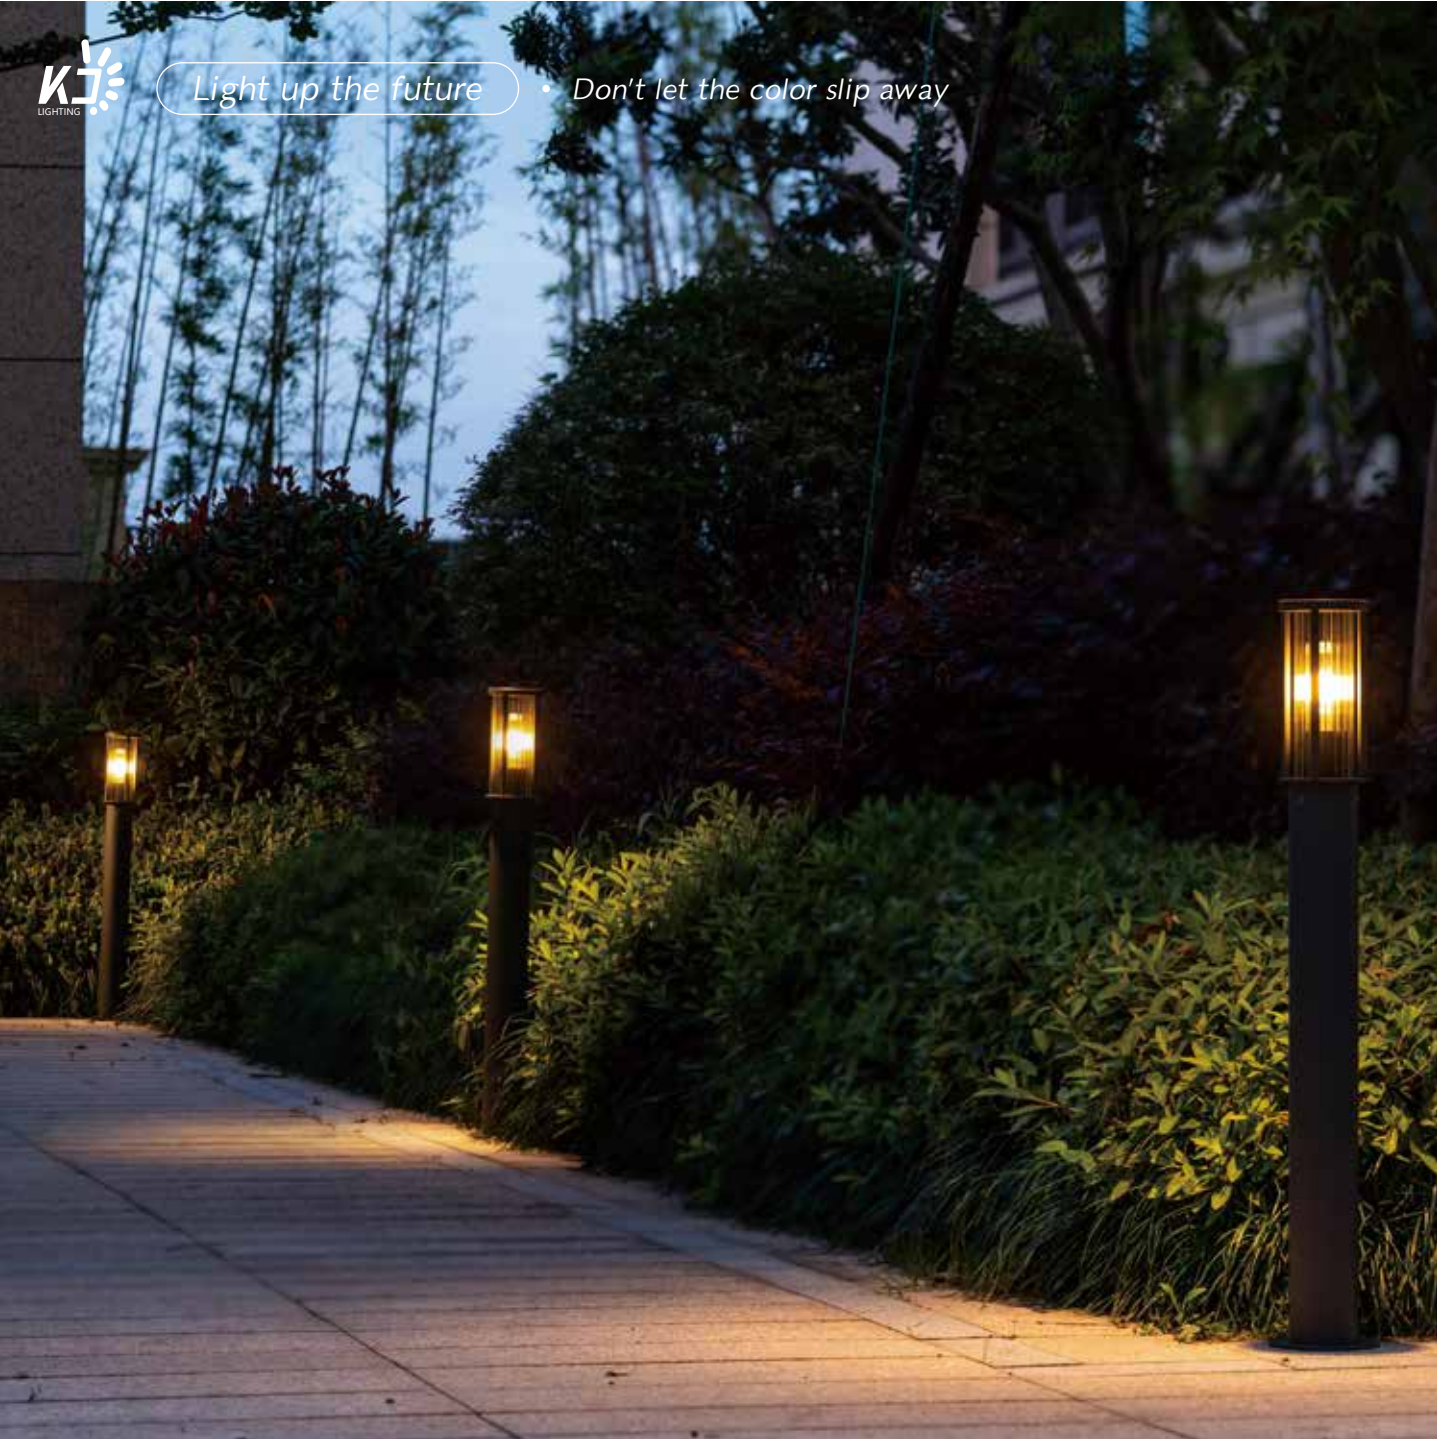

Light up the future

• Don't let the color slip away



B235-500

B235-800

Item No.	B235-500 / B235-800
Watt	E27 Max.8W
Input	220-240V ~ 50Hz
Safety type	IP44 Class 1

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket



Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size

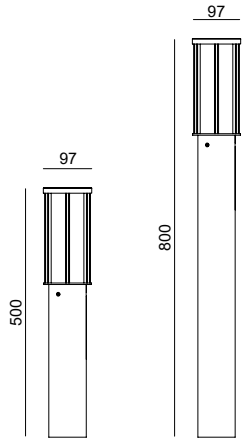



Light up the future • Don't let the color slip away



Item No.	B236	B237
Watt	LED SMD 8W	LED SMD 8W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	800lm	800lm
Beam Angle	120°	120°
CRI	80	80
Input	DC12V/24V	DC12V/24V
Power factor	≥0.8	≥0.8
Safety type	IP65 Class III	IP65 Class III

Description



- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket




Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Lighting snapshot

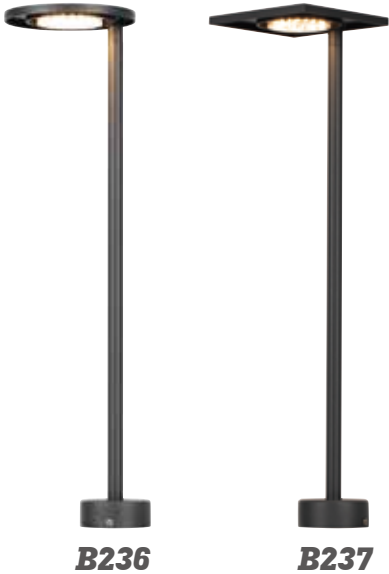

Size

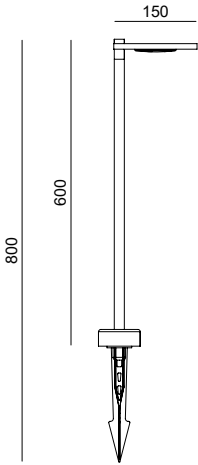

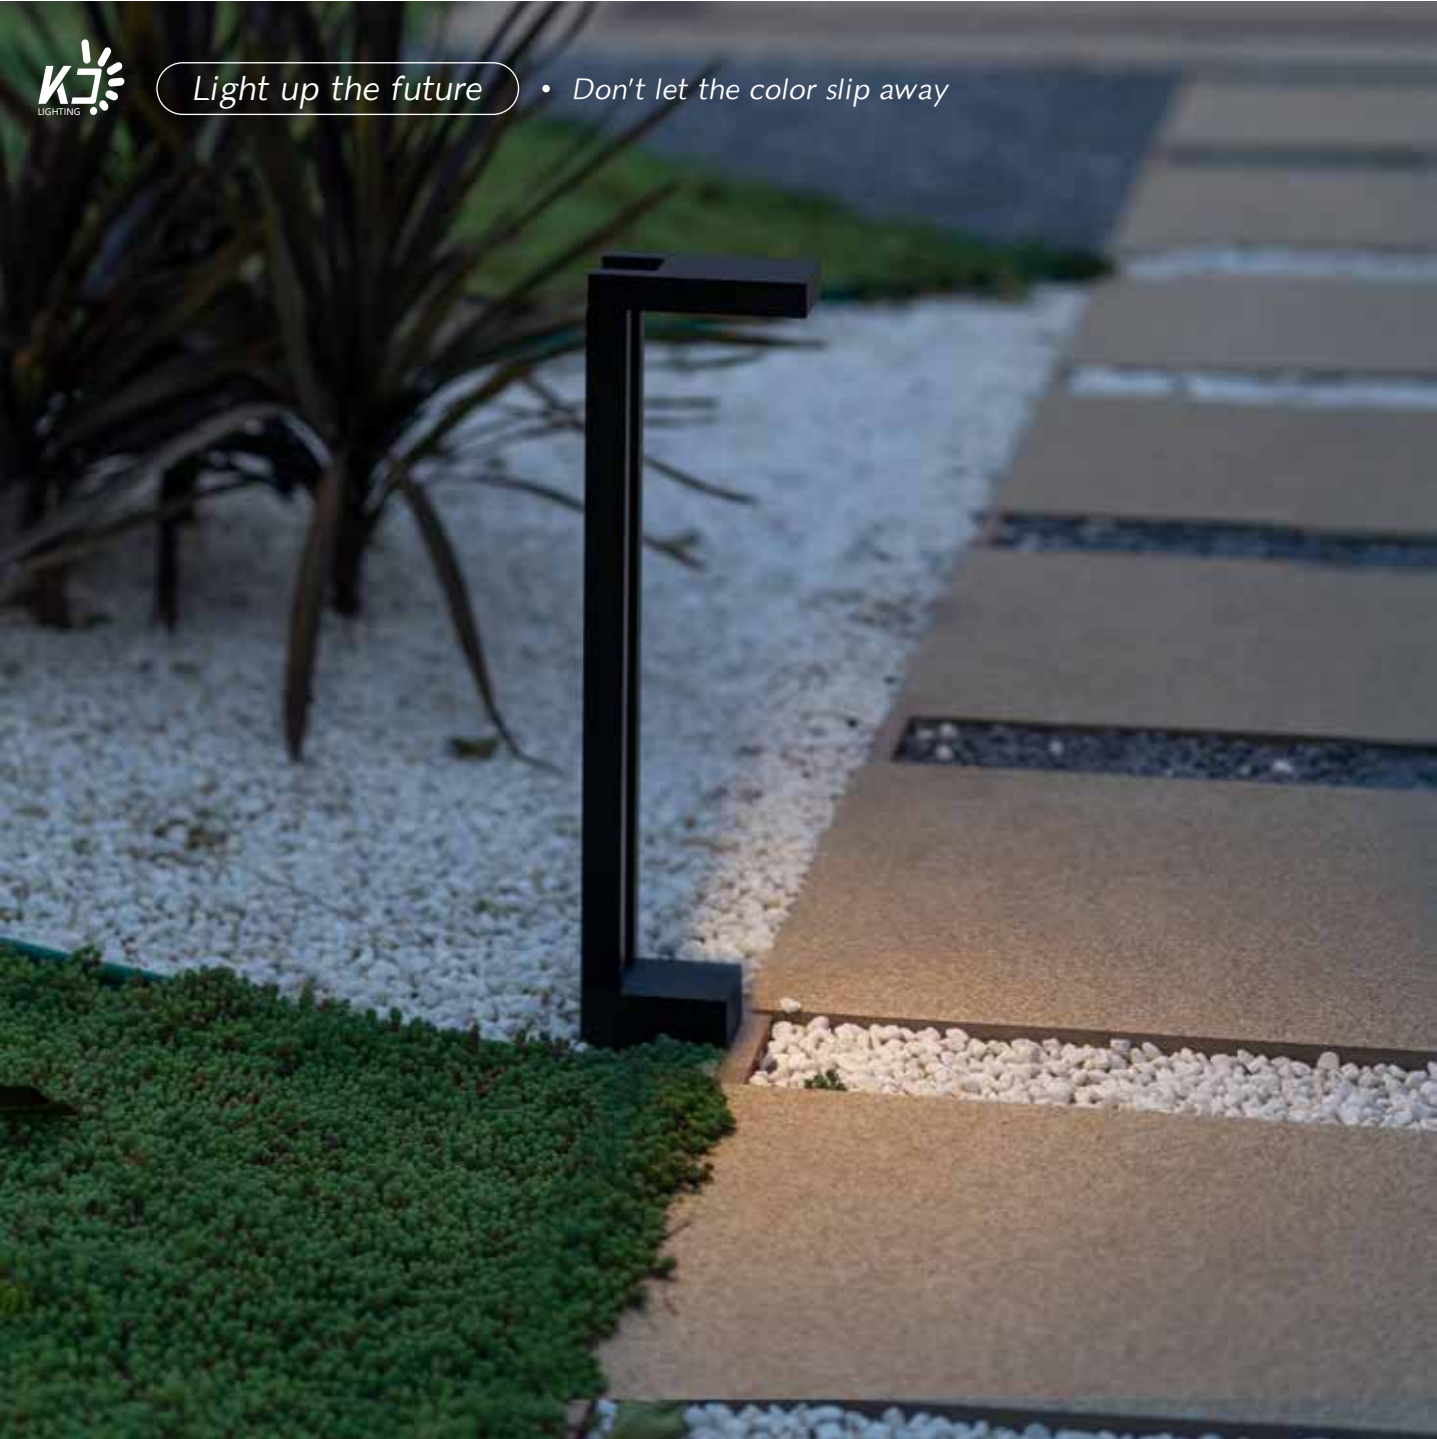

Light up the future • Don't let the color slip away



B238

Item No.	B238
Watt	LED SMD 6W
Led Color Option	2700K-6500K
Luminous flux	300lm(3000K)
Beam Angle	120°
CRI	80
Input	DC12/24V
Power factor	≥ 0.8
Safety type	IP54 Class III

Description


Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket




Finishing Color

WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size

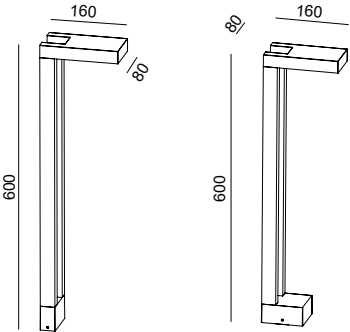

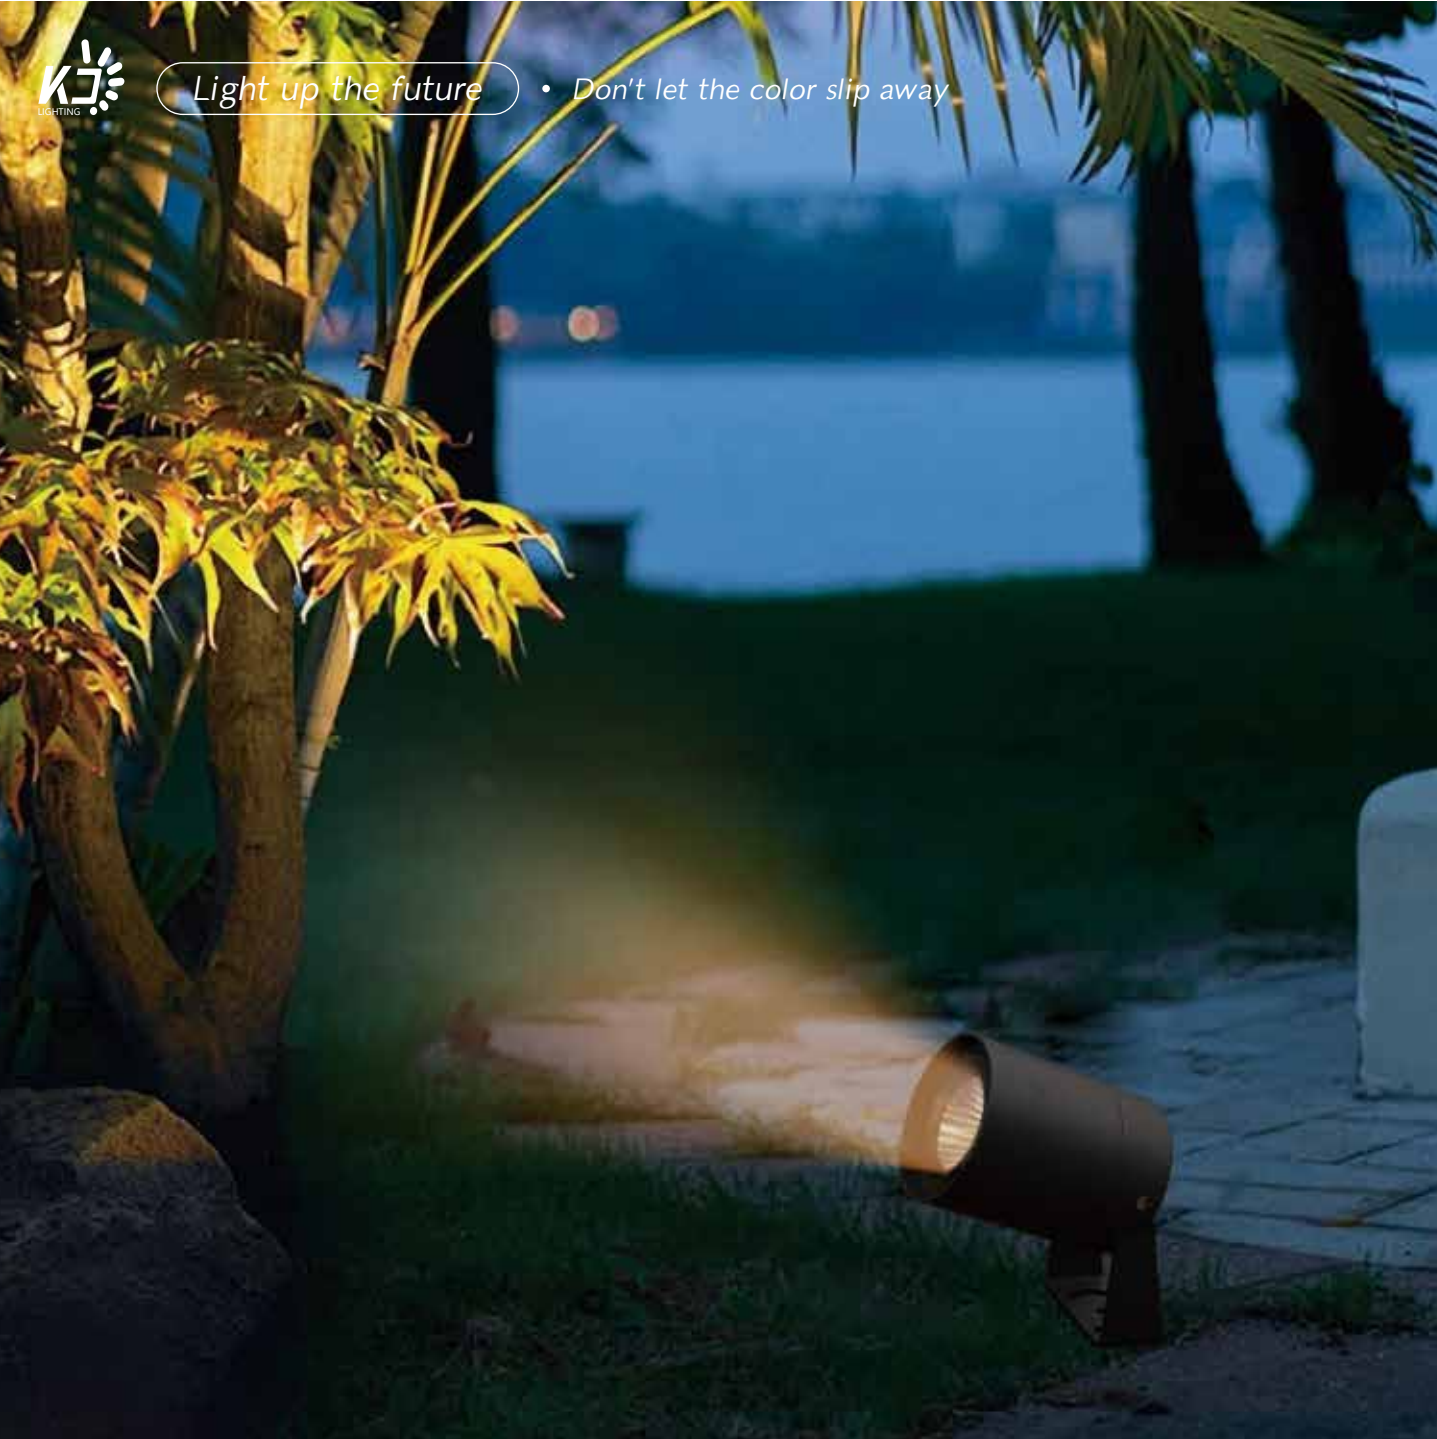


Item No.	S721	S723
Watt	LED SMD 12W	LED SMD 20W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	1200lm(3000K)	1400lm(3000K)
Beam Angle	38°	38°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.82	≥ 0.9
Safety type	IP65 Class I	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket


⏚ CE RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	

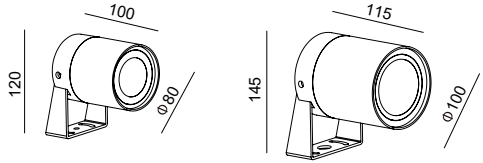






Light up the future • Don't let the color slip away

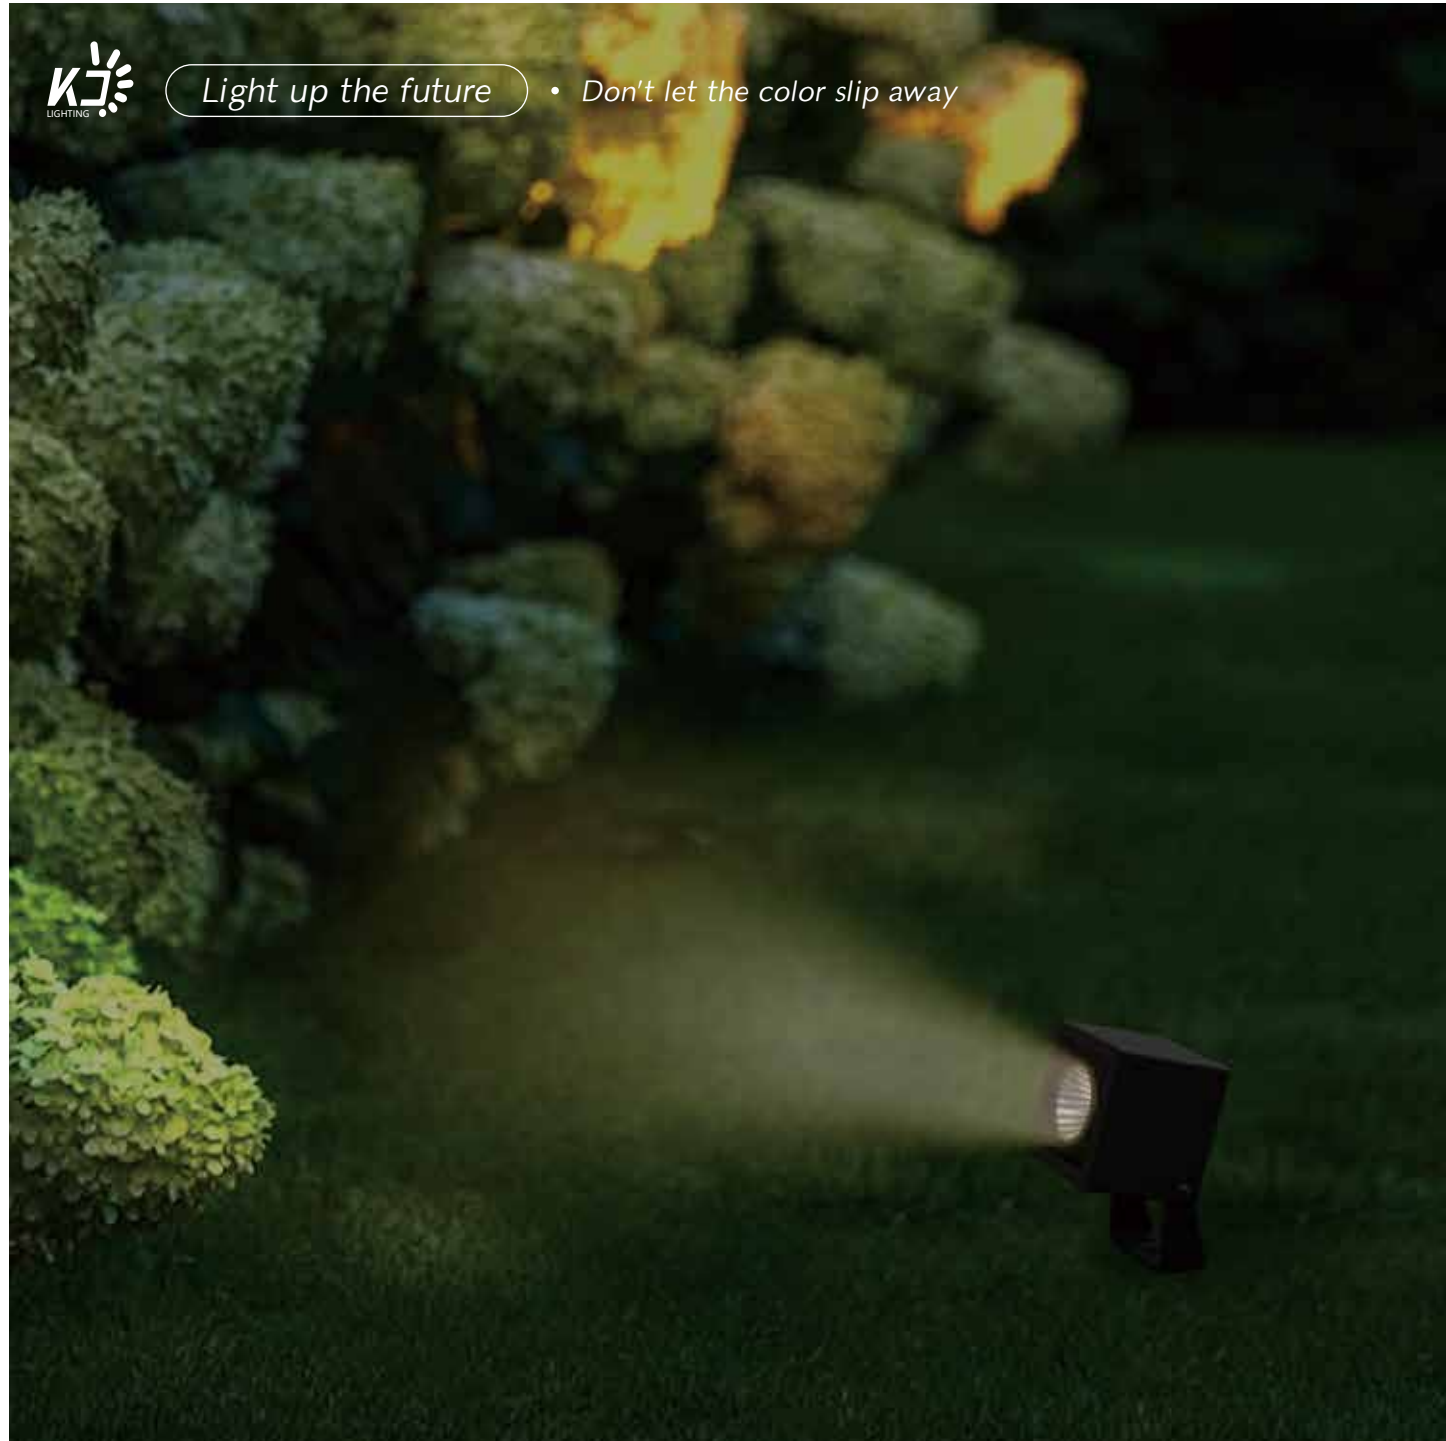

S722



S724

Item No.	S722	S724	Finishing Color	
Watt	LED SMD 12W	LED SMD 20W	WHITE	
Led Color Option	2700K-6500K	2700K-6500K	SILVER GREY	
Luminous flux	1200lm(3000K)	1400lm(3000K)	DARK GREY	
Beam Angle	38°	38°	BLACK	
CRI	80	80	Size	
Input	220-240V ~ 50Hz	220-240V ~ 50Hz		
Power factor	≥ 0.82	≥ 0.9		
Safety type	IP65 Class I	IP65 Class I		

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use

Glass Diffuser

Silicon rubber gasket

  RoHS



Light up the future • Don't let the color slip away




Item No.	WM045	WM047
Watt	LED COB 7W	GU10 Max.35W
Led Color Option	3000K	/
Luminous flux	750lm	/
Beam Angle	24°	/
CRI	80	/
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	/
Safety type	IP65 Class 1	IP65 Class 1

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color
WHITE
SILVER GREY
DARK GREY
BLACK
Size

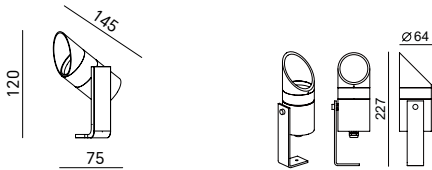



Light up the future • Don't let the color slip away


Item No.	S716
Watt	LED CREE 1304 7W
Led Color Option	2700K~6500K
Luminous flux	470lm(3000K)
Beam Angle	12°24°36°
CRI	80
Input	220-240V~ 50Hz
Power factor	≥0.54
Safety type	IP65 Class I

Description



- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	



S716

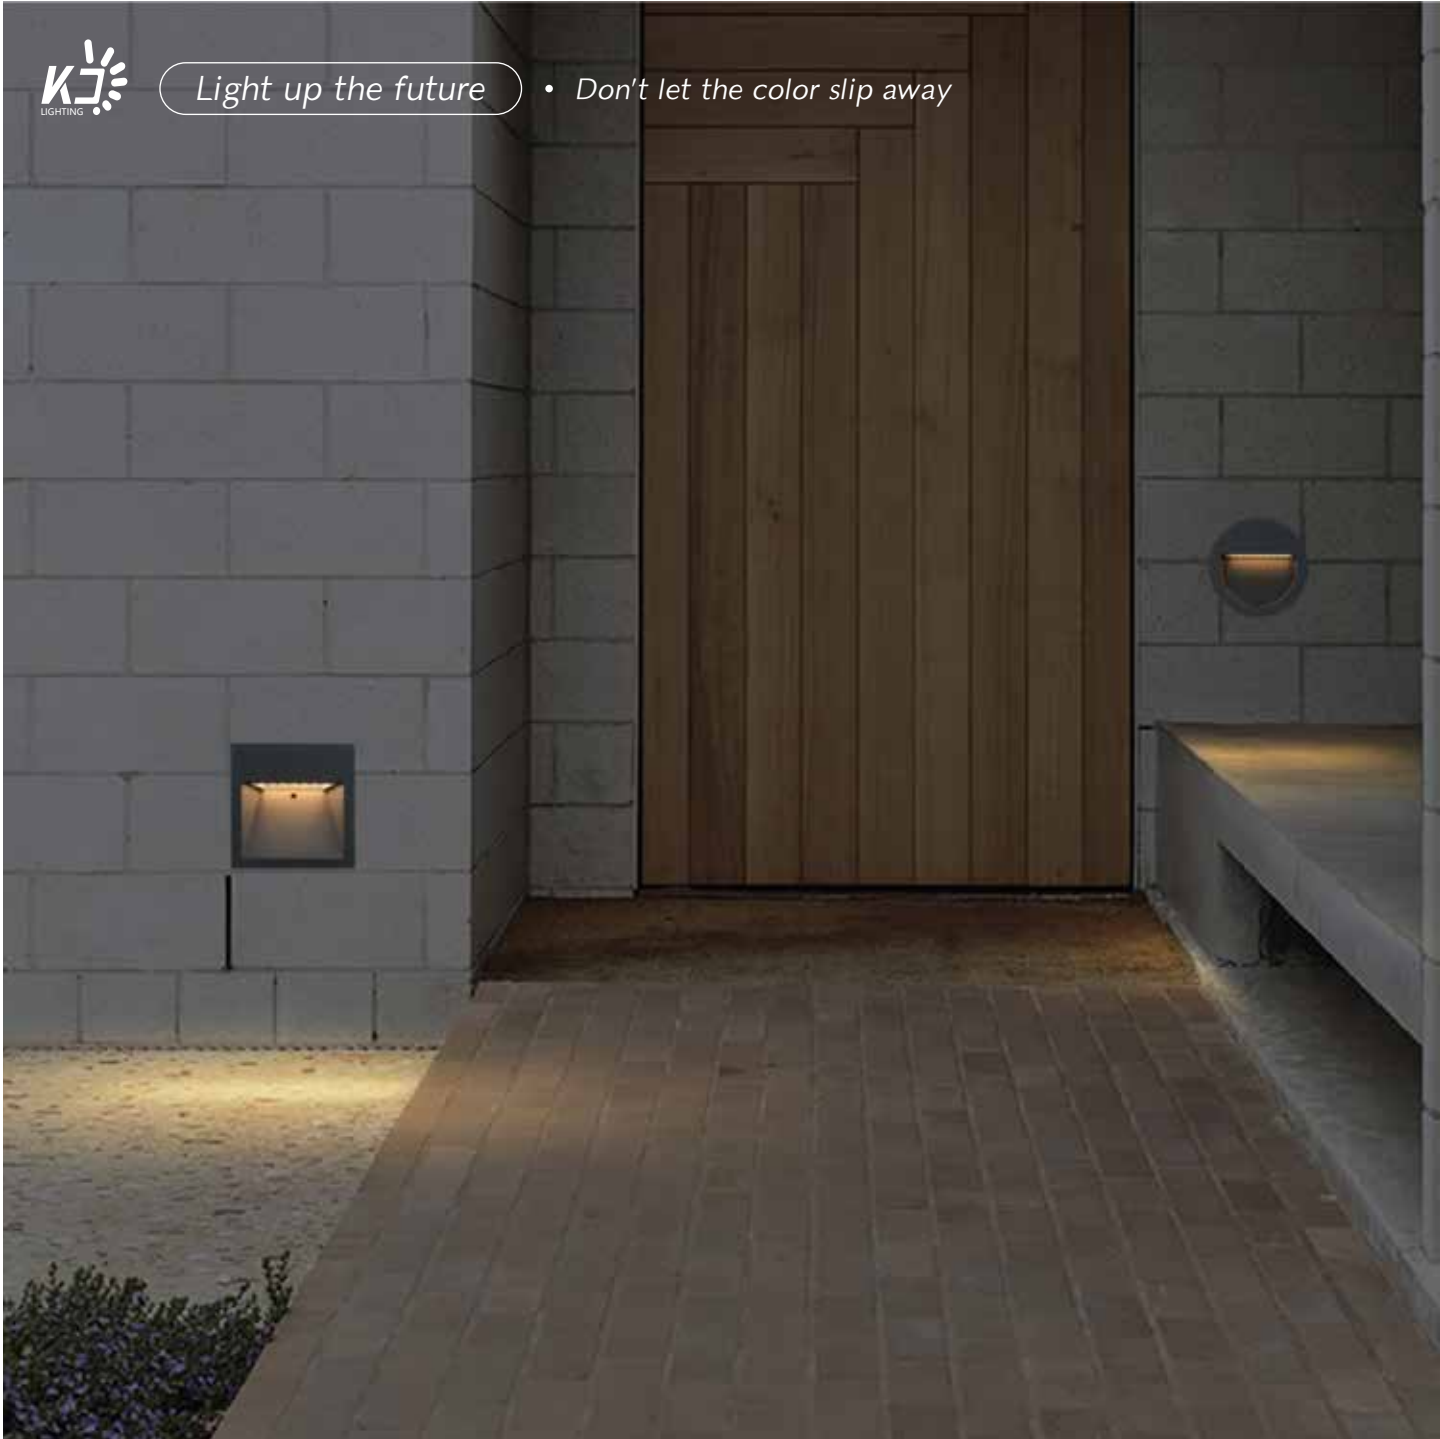

WR030



WR040

Item No.	WR030	WR040
Watt	LED SMD 4W	LED SMD 4W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	100lm(3000K)	140lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	≥0.8
Safety type	IP65 Class 1	IP65 Class 1

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⚡ CE RoHS


Finishing Color

- WHITE 
- SILVER GREY 
- DARK GREY 
- BLACK 

Lighting snapshot



Size

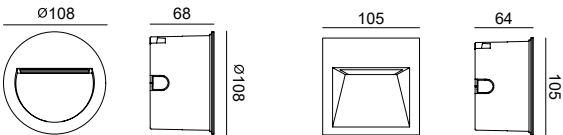



Light up the future • Don't let the color slip away



WM041



WR041

Item No.	WM041	WR041
Watt	LED SMD 10W	LED SMD 10W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	250lm(3000K)	250lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.9	≥0.9
Safety type	IP65 Class 1	IP65 Class 1

Description

Die-cast aluminium Body
Powder coated with pretreatment for outdoor use
Glass Diffuser
Silicon rubber gasket






Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Lighting snapshot



Size



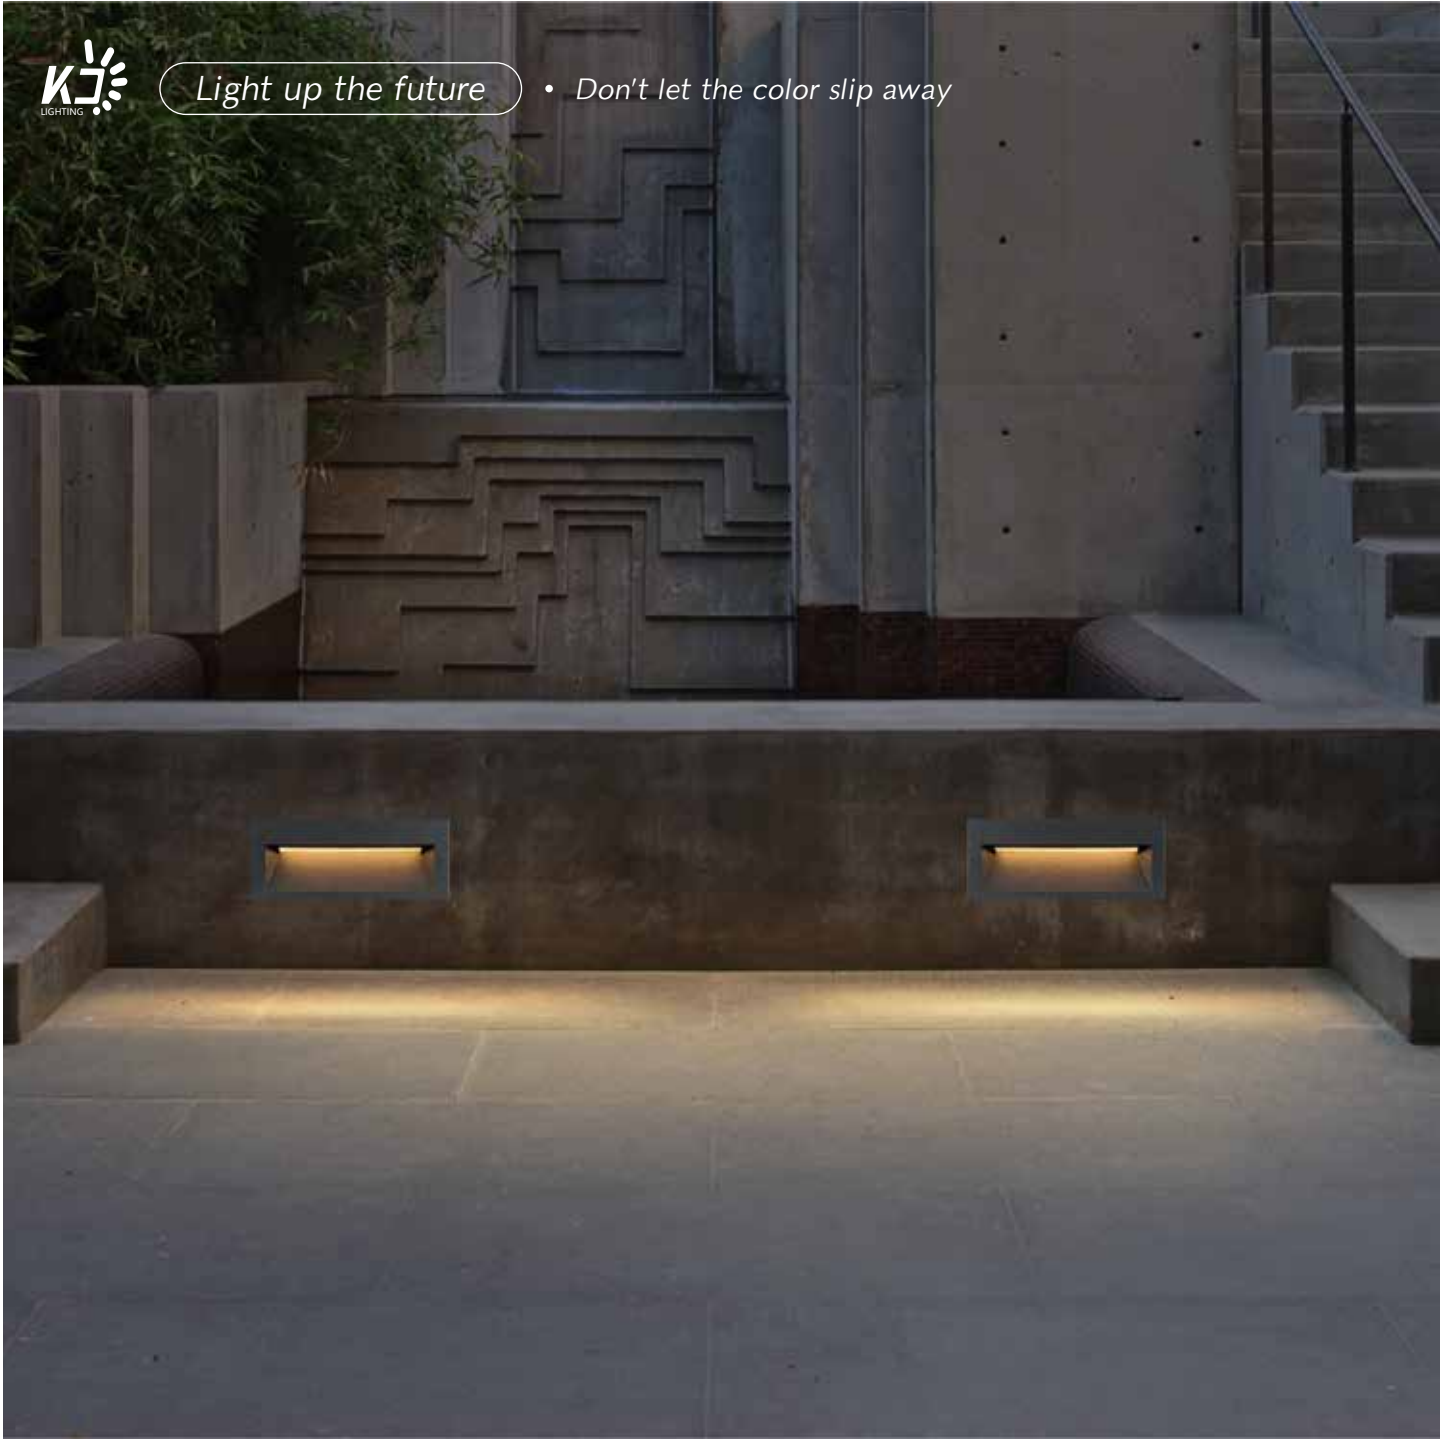

Light up the future • Don't let the color slip away



WR046



WR047B

Item No.	WM046	WR047B
Watt	LED SMD 4W	LED SMD 4W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	180lm(3000K)	180lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.8	≥0.8
Safety type	IP65 Class 1	IP65 Class 1

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket




Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Lighting snapshot



Size



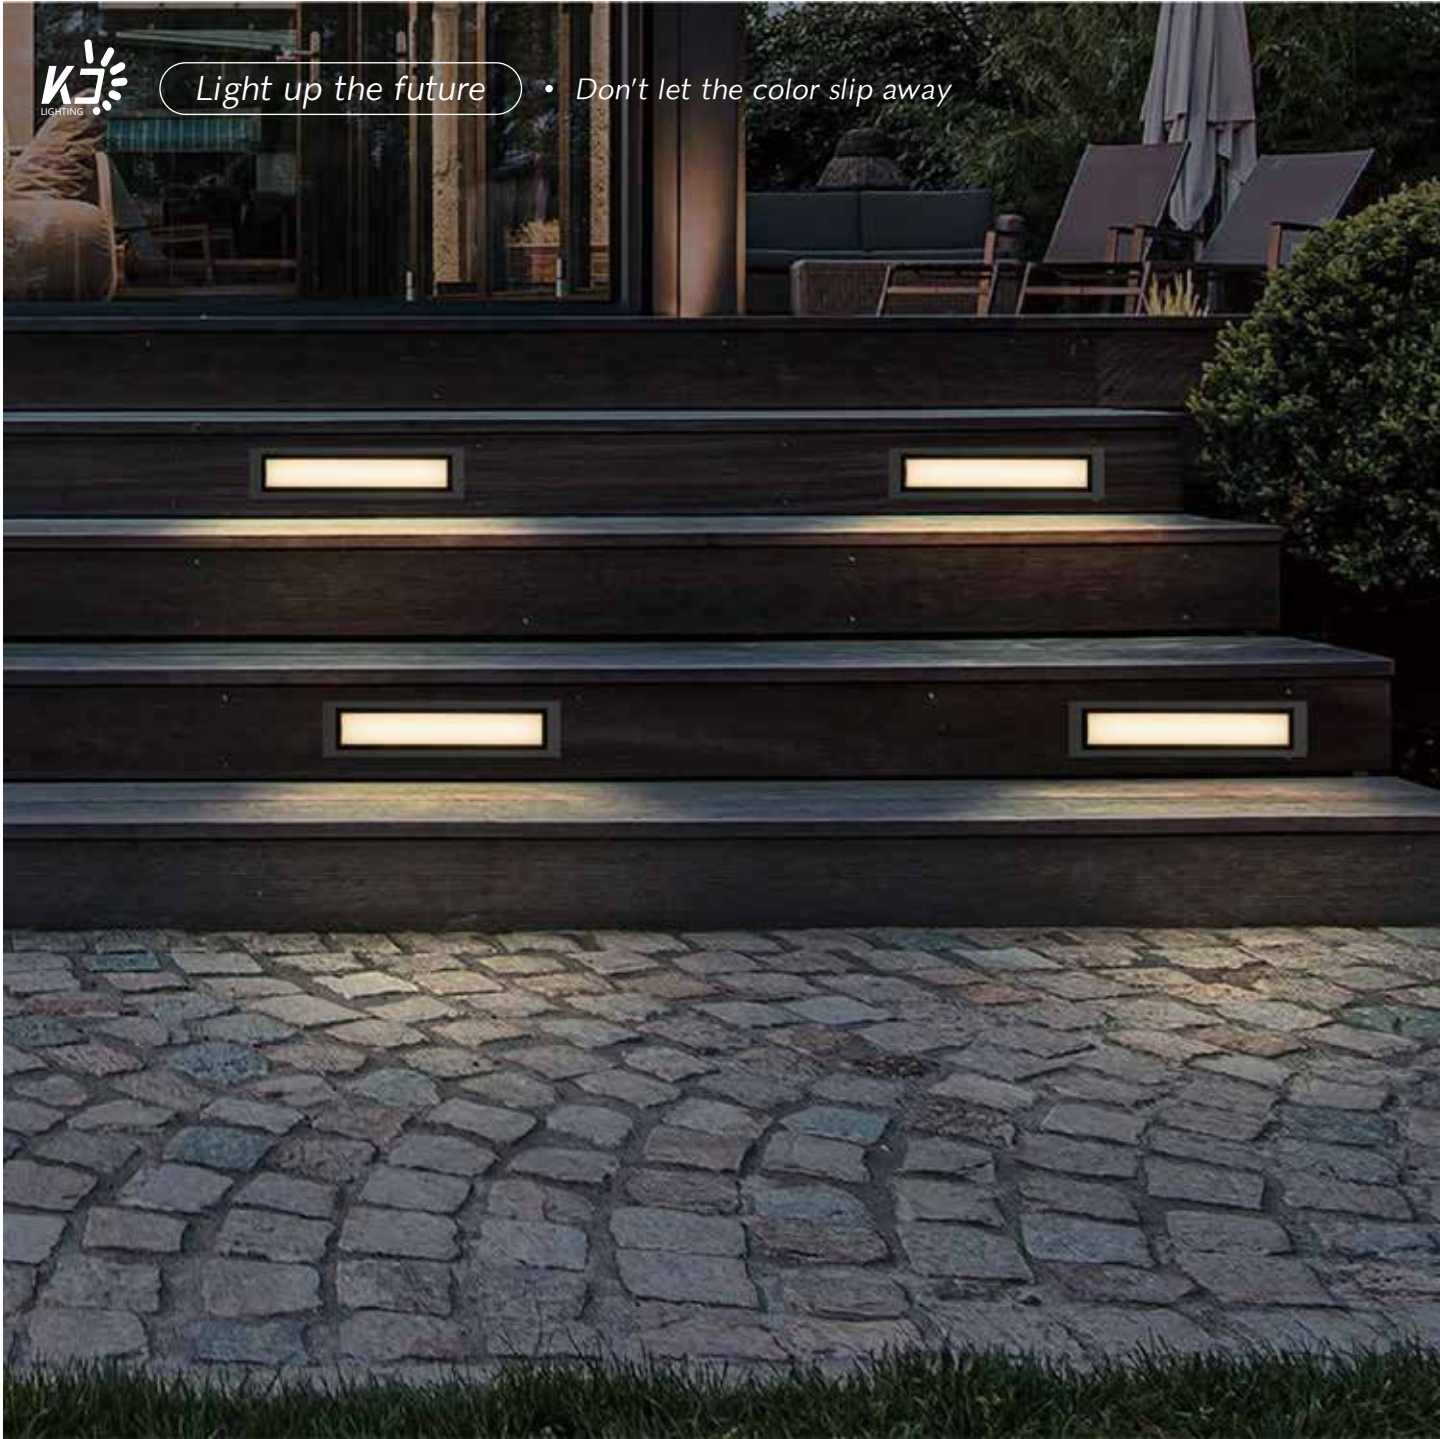

Light up the future • Don't let the color slip away



WR048



WR049

Item No.	WR048	WR049
Watt	LED SMD 10W	LED SMD 10W
Led Color Option	2700K~6500K	2700K~6500K
Luminous flux	400lm(3000K)	320lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V~ 50Hz	220-240V~ 50Hz
Power factor	≥0.9	≥0.9
Safety type	IP65 Class 1	IP65 Class 1

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket




Finishing Color


- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Lighting snapshot



Size



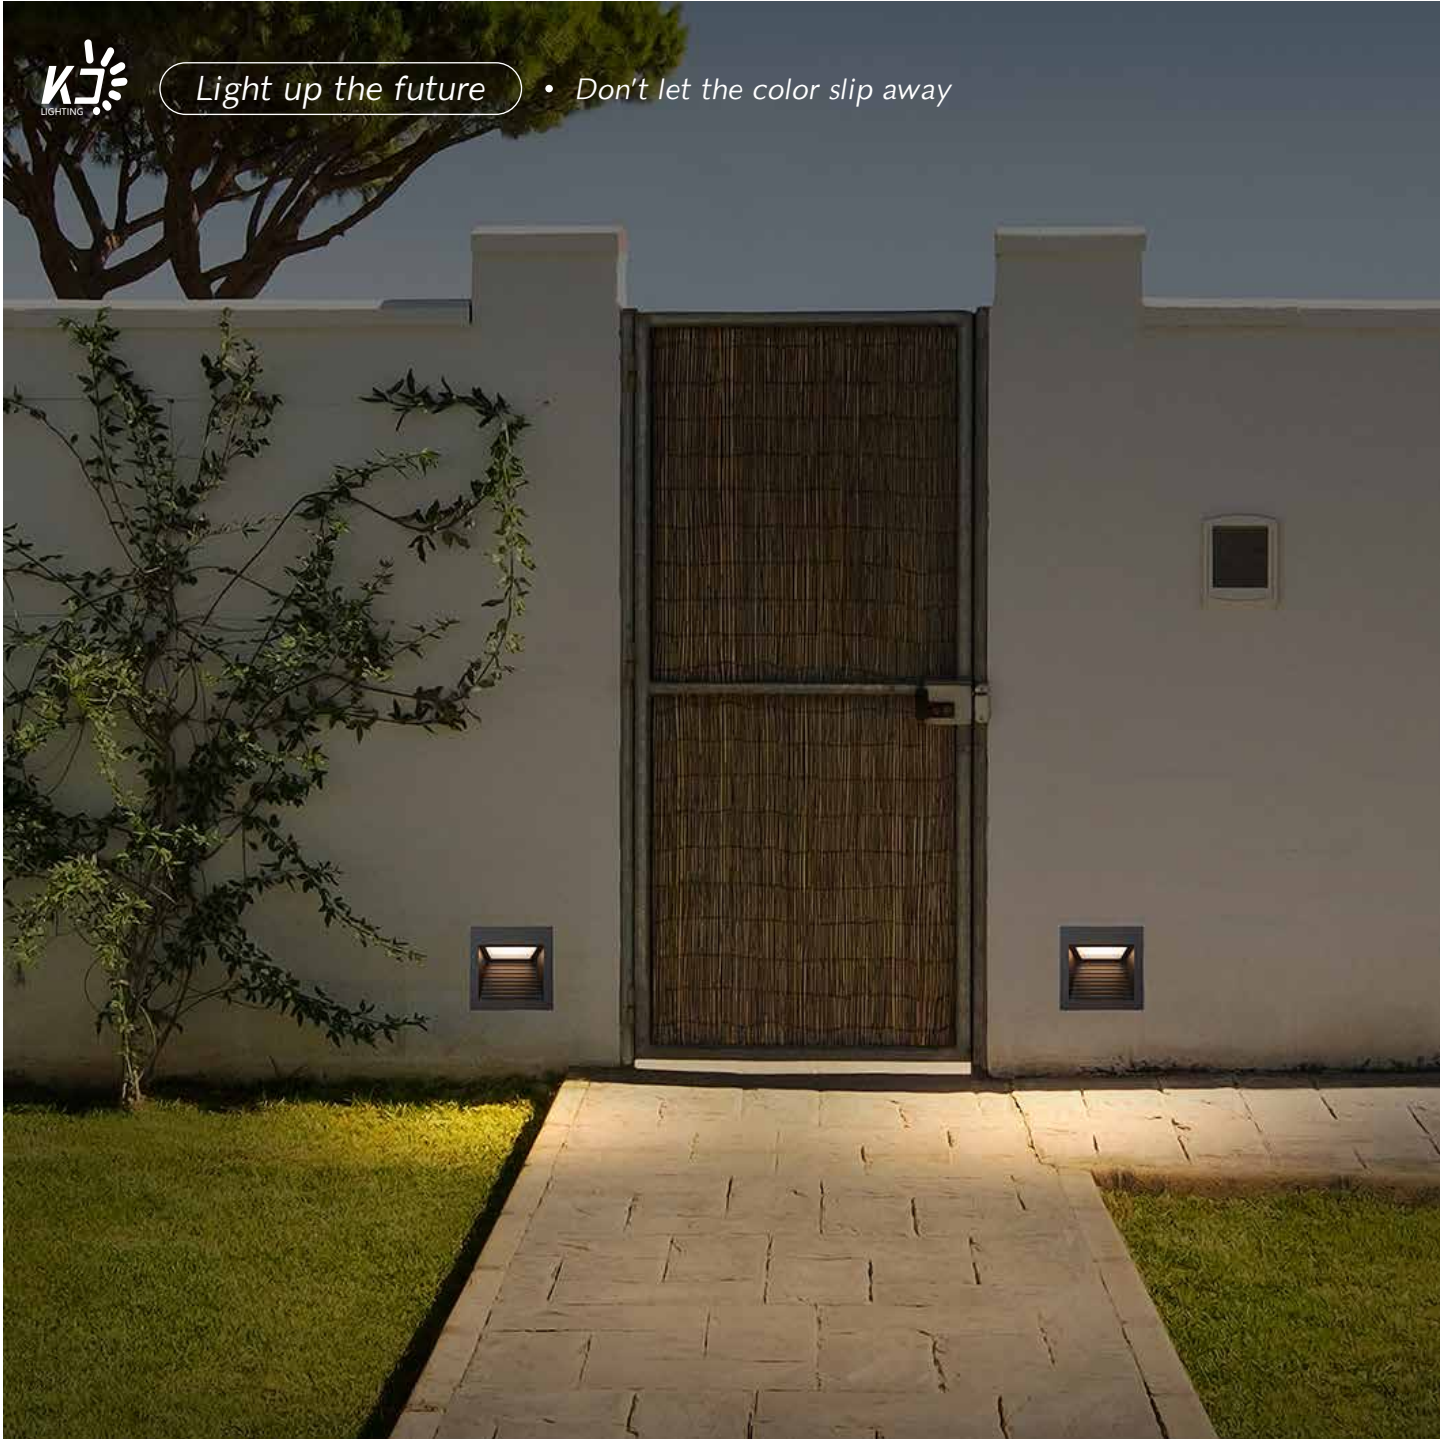

Light up the future

• Don't let the color slip away



WR052



WM052




Item No.	WR052	WM052
Watt	LED SMD 20W	LED SMD 20W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	1600lm(3000K)	1600lm(3000K)
Beam Angle	120°	80°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.9
Safety type	IP65 Class I	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	
Size	





WM054



WR054A



WR054B

Item No.	WM054	WR054A	WR054B
Watt	LED SMD 3.5W	LED SMD 3.5W	LED SMD 3.5W
Led Color Option	2700K-6500K	2700K-6500K	2700K-6500K
Luminous flux	150lm(3000K)	150lm(3000K)	150lm(3000K)
Beam Angle	120°	120°	120°
CRI	80	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.8	≥ 0.8
Safety type	IP65 Class I	IP65 Class I	IP65 Class I

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⏚ CE RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	

Size	



WM033



WM034

Item No.	WM033	WM034
Watt	LED COB 6W	LED COB 6W
Led Color Option	2700K-6500K	2700K-6500K
Luminous flux	600lm(3000K)	600lm(3000K)
Beam Angle	120°	120°
CRI	80	80
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Power factor	≥ 0.8	≥ 0.8
Safety type	IP65 Class I	IP65 Class I

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⚡ CE RoHS

Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

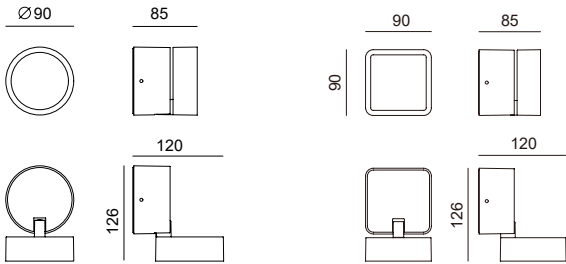

WM115



WM116

Item No.	WM115	WM116
Watt	GU10 Max.2×35W	GU10 Max.2×35W
Input	220-240V ~ 50Hz	220-240V ~ 50Hz
Safety type	IP65 Class I	IP65 Class I

Description


- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket

⚡ CE RoHS

Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size






WM476

Item No.	WM476 / WM476-PIR	Finishing Color	
Watt	LED SMD 21W	WHITE	
Led Color Option	2700K-6500K	SILVER GREY	
Luminous flux	2000lm(3000K)	DARK GREY	
Beam Angle	120°	BLACK	
CRI	80	Size	
Input	220-240V ~ 50Hz		
Power factor	≥ 0.8		
Safety type	IP65 Class I		
Description			
Die-cast aluminium Body			
Powder coated with pretreatment for outdoor use			
PC Diffuser			
Silicon rubber gasket			
CE RoHS			



WM155

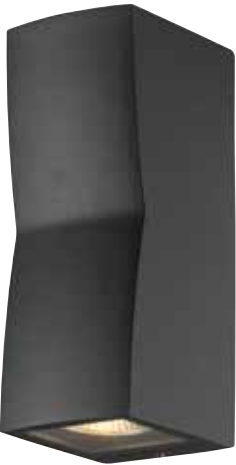

WM156

Item No.	WM155	WM156
Watt	GU10 Max.35W	GU10 2×Max.35W
Input	200-240V~ 50Hz	200-240V~ 50Hz
Safety type	IP54 Class 1	IP54 Class 1

Description

Die-cast aluminium Body

Powder coated with pretreatment for outdoor use


Glass Diffuser

Silicon rubber gasket



 RoHS

Finishing Color	
WHITE	
SILVER GREY	
DARK GREY	
BLACK	

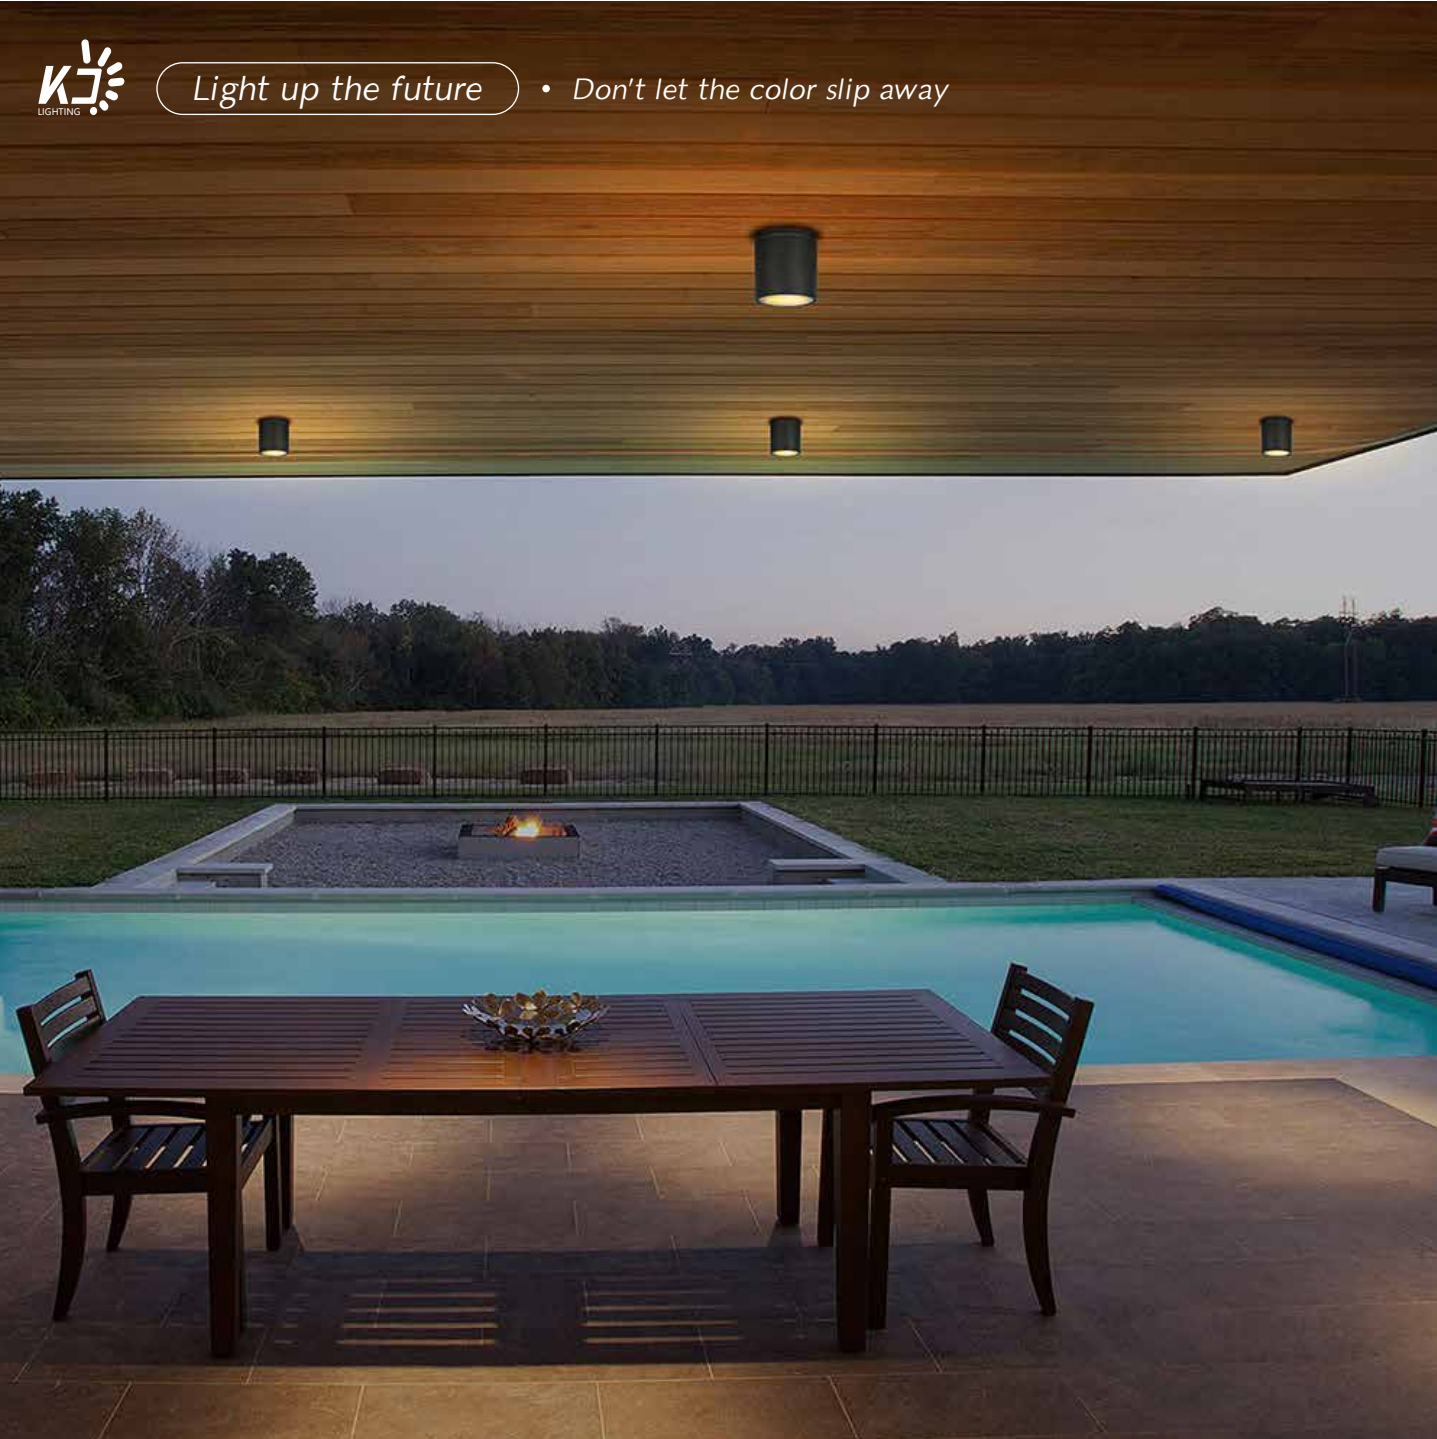

Light up the future • Don't let the color slip away



CM001



CM002



CM011

Item No.	CM001	CM002	CM011
Watt	GU10 Max.35W	GU10 Max.35W	E27 Max.60W
Input	220-240V ~ 50Hz	220-240V ~ 50Hz	220-240V~ 50Hz
Safety type	IP65 Class I	IP65 Class I	IP65 Class 1

Description

- Die-cast aluminium Body
- Powder coated with pretreatment for outdoor use
- Glass Diffuser
- Silicon rubber gasket



Finishing Color

- WHITE
- SILVER GREY
- DARK GREY
- BLACK

Size

